



**AD-A221 133**



**Research Product 90-05**

**DTIC FILE COPY**

# **Design of a Joint Service Multipurpose Arcade Combat Simulator (JMACS)**



**January 1990**

**Field Unit at Fort Benning, Georgia  
Training Research Laboratory**

**U.S. Army Research Institute for the Behavioral and Social Sciences**

Approved for public release; distribution is unlimited

**90 05 01 002**

# **U.S. ARMY RESEARCH INSTITUTE FOR THE BEHAVIORAL AND SOCIAL SCIENCES**

**A Field Operating Agency Under the Jurisdiction  
of the Deputy Chief of Staff for Personnel**

**EDGAR M. JOHNSON**  
Technical Director

**JON W. BLADES**  
COL, IN  
Commanding

---

## **Naval Training Systems Center**

**H. C. Okraski**  
Deputy Technical Director

**E. L. LEWIS**  
CAPT, USN  
Commanding

---

Technical review by

Jean L. Dyer  
Franklin L. Moses

### **NOTICES**

**DISTRIBUTION:** Primary distribution of this report has been made by ARI. Please address correspondence concerning distribution of reports to U.S. Army Research Institute for the Behavioral and Social Sciences, ATTN: PERI-FOX, 5001 Eisenhower Ave., Alexandria, Virginia 22333-5600.

**FINAL DISPOSITION:** This report may be destroyed when it is no longer needed. Please do not return it to the U.S. Army Research Institute for the Behavioral and Social Sciences.

**NOTE:** The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS --		
2a. SECURITY CLASSIFICATION AUTHORITY --			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution is unlimited.		
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE --			4. PERFORMING ORGANIZATION REPORT NUMBER(S) ARI Research Product 90-05		
5. MONITORING ORGANIZATION REPORT NUMBER(S) --			6a. NAME OF PERFORMING ORGANIZATION U.S. Army Research Institute Fort Benning Field Unit		
6b. OFFICE SYMBOL (If applicable) PERI-IJ			7a. NAME OF MONITORING ORGANIZATION U.S. Army Research Institute for the Behavioral and Social Sciences		
6c. ADDRESS (City, State, and ZIP Code) P.O. Box 2086 Fort Benning, GA 31905-0686			7b. ADDRESS (City, State, and ZIP Code) 5001 Eisenhower Avenue Alexandria, VA 22333-5600		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION --			8b. OFFICE SYMBOL (If applicable) --		
9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER --			8c. ADDRESS (City, State, and ZIP Code) --		
10. SOURCE OF FUNDING NUMBERS			PROGRAM ELEMENT NO. 64722D		
PROJECT NO. 750			TASK NO. 517		
WORK UNIT ACCESSION NO. C1					
11. TITLE (Include Security Classification) Design of a Joint Service Multipurpose Arcade Combat Simulator (JMACS)					
12. PERSONAL AUTHOR(S) Evans, Kenneth L., (ARI); Marshall, Albert H., & Wolff, Ronald S. (Naval Training Systems Center); Broom, John M., & Greene, William H. (Litton Computer Services)					
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM 85/10 TO 89/09		14. DATE OF REPORT (Year, Month, Day) 1990, January	
15. PAGE COUNT					
16. SUPPLEMENTARY NOTATION Prepared in cooperation with the Naval Training Systems Center (Orlando, FL) and Litton Computer Services (Fort Benning, GA).					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Computer simulation, Rifle marksmanship, Instructional materials, Training aid. (SDW) --		
05	06				
19	06				
19. ABSTRACT (Continue on reverse if necessary and identify by block number) This report documents the design of the hardware and software used in the Joint Service Multipurpose Arcade Combat Simulator (JMACS) project. The JMACS project was an outgrowth of the Multipurpose Arcade Combat Simulator (MACS), a patented part-task weapons trainer developed by the U.S. Army Research Institute for the Behavioral and Social Sciences to overcome the training problems encountered due to insufficient facilities, ammunition, and qualified instructors. A MACS system consists of a long-distance light pen mounted to a weapon or mock-up, a microcomputer, a video monitor, and a software cartridge. Following testing of prototype systems in the Army, the Navy and Air Force became interested in potential applications of MACS technology for weapons training programs. This interest led to the initiation of the JMACS project, sponsored by the Joint Service Manpower and Training Technology Development Program. The JMACS project funded the development of a long-distance light pen (patent pending) and light pen mount by the Naval Training Systems Center, introduced MACS technology to the Air Force and Navy in a series of field tests, and supported ongoing MACS development and evaluation in the Army. Keywords:					
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Seward Smith			22b. TELEPHONE (Include Area Code) (404) 545-1278		22c. OFFICE SYMBOL PERI-IJ

**Research Product 90-05**

**Design of a Joint Service Multipurpose  
Arcade Combat Simulator (JMACS)**

**Kenneth L. Evans**  
U.S. Army Research Institute

**Albert H. Marshall and Ronald S. Wolff**  
Naval Training Systems Center

**John M. Broom and William H. Greene**  
Litton Computer Services

**Field Unit at Fort Benning, Georgia,  
Seward Smith, Chief**

**Training Research Laboratory  
Jack H. Hiller, Director**

**U.S. Army Research Institute for the Behavioral and Social Sciences  
5001 Eisenhower Avenue, Alexandria, Virginia 22333-5600**

**Office, Deputy Chief of Staff for Personnel  
Department of the Army**

**January 1990**

---

**Army Project Number  
2Q464722D750**

**Education and Training Systems**

**Approved for public release; distribution is unlimited.**

## FOREWORD

---

The Joint Service Multipurpose Arcade Combat Simulator (JMACS) project was an outgrowth of the Multipurpose Arcade Combat Simulator (MACS), a patented part-task weapons trainer developed by the Fort Benning Field Unit of the U.S. Army Research Institute (ARI) to address training problems arising from insufficient facilities, ammunition, and numbers of qualified instructors. The MACS system consists of a microcomputer, video monitor, software, and long-distance light pen mounted to a weapon or mock-up. Although MACS is inexpensive, it has been found to be as effective as more costly training devices, particularly in the area of rifle marksmanship training.

Following Army testing of prototype systems, the Navy and Air Force became interested in potential training applications of MACS technology. This interest led to the initiation of the JMACS project, sponsored by the Joint Services Program (PE64722A) on Manpower and Training Technology Development. The JMACS project funded the development of an improved light pen (patent pending) and light pen mount by the Naval Training Systems Center (NTSC), introduced MACS technology to the Air Force and Navy in a series of field tests, and supported ongoing MACS development and evaluation in the Army.

This report documents the design of the hardware and software used in the JMACS project, as well as more recent developments in the areas of light pen and software design. Three organizations cooperated in its preparation: the ARI Fort Benning Field Unit, its resident scientific support contractor, Litton Computer Services, and the Advanced Simulation Concepts Laboratory of NTSC. The contributions of each organization were crucial to the overall success of the project.

The Navy, Air Force, and Coast Guard have maintained interest in this technology through a number of demonstration projects that evolved from the original JMACS field tests. However, the Army has been most vigorous in its pursuit of the training benefits resulting from MACS use. With the support of the senior leadership of the U.S. Army Infantry School, the U.S. Army Forces Command, and the U.S. Army Training and Doctrine Command, over 400 MACS M16A1 rifle systems have been fielded Army-wide to date. It should be noted that all MACS hardware components are now available commercially, due to the efforts of the Fort Benning Training Support Center in developing MACS contract specifications. By duplicating the latest MACS software and obtaining components from commercial sources, the Fort Benning Training Support Center has been able to offer MACS M16A1 rifle systems at a total cost of \$950 per system (plus shipping) to requesting units and schools.



H. C. OKRASKI  
Deputy Technical Director  
Naval Training Systems Center



EDGAR M. JOHNSON  
Technical Director  
Army Research Institute

## ACKNOWLEDGMENTS

Portions of this research were sponsored by the Joint Service Manpower and Training Technology Development Program (PE64722A). Mrs. Ellen Wiley of Litton Computer Services provided the computer graphics presented in this report.



Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

# DESIGN OF A JOINT SERVICE MULTIPURPOSE ARCADE COMBAT SIMULATOR (JMACS)

## CONTENTS

---

	Page
INTRODUCTION . . . . .	1
HARDWARE DESIGN . . . . .	3
Microcomputer . . . . .	3
Monitor . . . . .	3
Program Cartridge . . . . .	3
Light Pen . . . . .	4
Light Pen Mount . . . . .	7
Rifle and Trigger Switch . . . . .	7
SOFTWARE DESIGN . . . . .	7
LESSONS LEARNED IN HARDWARE AND SOFTWARE DEVELOPMENT . . . . .	8
COMMERCIAL AVAILABILITY AND PRODUCT UTILIZATION . . . . .	9
REFERENCES . . . . .	11
APPENDIX A. BASIC PROGRAM LISTING AND 6510 ASSEMBLER SOURCE CODE FOR FOURTH-GENERATION BASIC RIFLE MARKSMANSHIP SOFTWARE . . . . .	13


## LIST OF FIGURES

Figure 1. The Multipurpose Arcade Combat Simulator (MACS) configured as an M16A1 rifle marksmanship trainer . . . . .	1
2. Schematic of the Naval Training Systems Center long-distance light pen (5 VDC power supply) . . . . .	5
3. Schematic of the Naval Training Systems Center improved long-distance light pen (5 VDC power supply) . . . . .	6

# DESIGN OF A JOINT SERVICE MULTIPURPOSE ARCADE COMBAT SIMULATOR (JMACS)

## Introduction

This report documents the design of the hardware and software used in the Joint Service Multipurpose Arcade Combat Simulator (JMACS) project. The JMACS project was an outgrowth of the Multipurpose Arcade Combat Simulator (MACS), a patented part-task weapons trainer developed by the Fort Benning Field Unit of the U.S. Army Research Institute in an effort to overcome the training problems sometimes encountered due to insufficient facilities, ammunition, and numbers of qualified instructors (Schroeder, 1984). A MACS system consists of a long-distance light pen mounted to a weapon or mock-up, a microcomputer, a video monitor, and a software cartridge (see Figure 1). As targets are presented on the monitor, the light pen determines the firer's point of aim and a switch mechanism attached to the weapon's trigger sends an electrical signal to the microcomputer when each shot is fired. Performance feedback to the firer is presented on the monitor after each shot or series of shots.

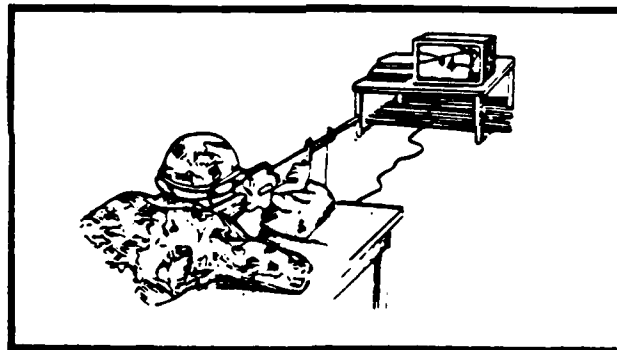

**Figure 1.** The Multipurpose Arcade Combat Simulator (MACS) configured as an M16A1 rifle marksmanship trainer.

MACS is capable of providing part-task training for a variety of weapon systems because the light pen can be moved from one weapon system to another accompanied by a change in the software cartridge. Further, it is relatively inexpensive to produce, because many of the components are available commercially. Due to the uniqueness of a weapons training device based on a long-distance light pen, the Army filed a U.S. patent application in 1984 that was awarded in 1986 (Schroeder, 1986). Following testing of prototype MACS systems by the U.S. Army Research Institute and the U.S. Army Infantry Board between 1982 and 1986, the U.S. Navy and U.S. Air Force became interested in the potential applications of MACS technology in their respective weapons training programs.

Navy and Air Force interest led to the initiation of a two-year Joint Service MACS (JMACS) project in fiscal year 1986 sponsored by the Joint Service Manpower and Training Technology Development Program. The JMACS project accomplished several objectives.



First, it funded the development of a long-distance light pen (patent pending) and light pen mount by engineers at the Naval Training Systems Center. Compared to the single-lens light pens used in earlier MACS prototypes, this light pen used a dual-lens focusing system that permitted its overall length and weight to be reduced by approximately one third. Further, it yielded more accurate light pen readings when in close temporal proximity to trigger switch closure, because its electronic circuitry was completely separate from that of the trigger switch. Second, the JMACS project funded the purchase of 25 MACS systems configured for the M16A1 rifle. Equipped with the Naval Training Systems Center light pen and mount, these systems were used for initial testing in the Navy and Air Force, as well as for support of the ongoing MACS development and evaluation program in the Army. Third, demilitarized M16A1 rifles were obtained from the Anniston Army Depot for the JMACS project to provide greater realism and durability than previously used mock-up rifles. Mock-ups contained lower receivers made of injection-molded plastic instead of metal. A pushbutton switch that more accurately replicated the force of pulling an actual M16A1 rifle's trigger also contributed to better realism.

Although current interest has focused on the use of MACS as an M16A1 rifle marksmanship trainer, prototype systems with demonstration software also have been developed for the M72A2 light antitank weapon (LAW), M203 grenade launcher, Mark 19 grenade machinegun, and the M136 (AT-4) LAW. Since exploratory research began on the MACS concept in 1982, over 20 developmental hardware tests, training and cost effectiveness evaluations, and informal field investigations have been conducted. Evans (1988) identified five major research trends in summarizing the history of MACS development and evaluation, including the JMACS project:

1. MACS performance is at least moderately related to both live-fire marksmanship performance and performance on a high-fidelity simulator.
2. In relatively extensive training programs over one week in duration, firers who receive MACS training in addition to standard training tend to perform slightly higher than those who receive standard training alone.
3. In less extensive training programs completed in one day, firers who receive a meaningful amount of MACS training prior to standard training tend to perform significantly higher than those who receive standard training alone.
4. The effectiveness of MACS training is greater for those individuals or groups having a lower initial level of ability.
5. MACS use in training is associated with a consistent reduction in the percentage of firers failing to meet minimum performance standards and with a significant reduction in subsequent ammunition expenditures.

In addition to these research trends, MACS use appears to have a number of intangible benefits in preparatory, remedial, and sustainment training (Evans, 1988). MACS provides precise and immediate performance feedback in a dry fire training environment, where the usual amount of performance feedback provided to instructors and firers is severely limited. With MACS it is now possible to provide a more standardized method of dry fire training and to establish more meaningful minimum performance

standards during this instruction. Another intangible benefit is that MACS training seems to be more enjoyable and interesting than conventional dry fire training methods, as student questionnaire responses have consistently indicated highly positive opinions of MACS training. Evans (1988) concluded that the benefits of MACS training exceed the costs associated with its use.

## **Hardware Design**

All MACS hardware originally consisted of off-the-shelf components, except for the light pen and light pen mount for the M16A1 rifle. These latter two items were designed for the JMACS project by engineers at the Naval Training Systems Center.

### **Microcomputer**

Although the Apple II series of microcomputers had been used in early MACS prototypes, the Commodore 64 microcomputer was selected later for its lower cost and its additional built-in features that included sprite graphics, a cartridge port, and light pen/joystick ports. It should be noted that the Commodore 64 is no longer manufactured. This model was replaced with the Commodore 64C, which has been found to be fully compatible with the original. However, it would be possible to adapt almost any microcomputer having graphics for MACS use, given a light pen interface and compatible software.

### **Monitor**

A Commodore 13-inch color monitor, the most current model being the 1802, is recommended for the MACS M16A1 rifle system. A monitor having this screen size provides for the proper scaling of computer-generated targets when viewed at a distance of 10 ft (3.05 m). If larger monitors are used, the distance to the screen should be increased accordingly. However, the light pen has not been tested for accuracy beyond a distance of 25 ft (7.62 m). In reality, many color monitors or televisions having a degausser and microcomputer-compatible cable could be used.

### **Program Cartridge**

MACS M16A1 rifle software, written in a combination of BASIC and 6510 assembly language, is adapted for use with an erasable programmable read only memory (EPROM) cartridge that is inserted in the cartridge port of the Commodore 64/64C microcomputer. The primary advantage of cartridge-based software is that it eliminates the need for, as well as the cost of, a disk drive in the hardware configuration. In addition, it speeds program loading and eliminates the need for typing loading commands on the microcomputer keyboard. Although a variety of program cartridges have been developed, the one for basic rifle marksmanship training uses three EPROM microchips (32k bytes x 8 bits each). All MACS cartridges consist of a plastic housing, a bank switch board with four sockets, and the EPROMs themselves. Obtained from the Jason-Ranheim Company of Auburn, California, the components required for one basic rifle marksmanship cartridge are one #PCCH-2 housing, one #PCC-4 bank switch board, and three #27256 EPROMS (either 12.5 or 21 V). When the bank switch board is used with 32k EPROMS, as is the case with


the basic rifle marksmanship cartridge, simple modifications must be made to the board in accordance with instructions provided by Jason-Ranheim.

### Light Pen


A key component of the MACS system is its long-distance light pen (patent pending), developed for the JMACS project by the Advanced Simulation Concepts Laboratory of the Naval Training Systems Center. This light pen, like all light pens, operates by detecting a scanned dot of light on the microcomputer's monitor. The instant the scanned dot of light is detected, a voltage pulse is transmitted from the light pen to the microcomputer. Because the microcomputer controls the scanned dot movement, it can then determine the position on the monitor where the light pen is pointed. The Naval Training Systems Center long-distance light pen, unlike other light pens, focuses the image of the scanning beam on its photodetector with a dual-lens telescope, which has a focal length that limits the area that can be detected on the face of the monitor. The telescope permits the light pen to operate at distances from the monitor that are far greater than those of ordinary light pens. Specifically, the long-distance light pen has been tested successfully in the laboratory at distances up to 25 ft (7.62 m). Compared with the single-lens light pen used in earlier MACS prototypes, the use of two lenses also allows the overall length, as well as the weight, of the light pen to be reduced by approximately one third.

Unique to the design of the Naval Training Systems Center light pen is its signal amplification and noise reduction circuitry (see Figure 2). Its photodetector diode (shown as D1 in Figure 2) is a current generator. A transimpedance amplifier (A1) produces a small signal as its output. The signal at A1 is the product of the diode current and the resistor at R1. This very small signal is then filtered and AC-coupled to the first amplifier stage (A2). The signal from A1 is filtered by a second-order high-pass butterworth filter (B1). Designed to have a cut-in frequency of about 14 kHz, this filter removes any noise generated by the power supply or by ambient light sources. Any noise sources below 1 kHz are reduced significantly by a factor of about 40 decibels. Next, the signal is amplified by a simple two-stage amplifier (B2 and B3). The amplified signal is now at a level of about 1 to 3 V, depending on screen brightness. Finally, the signal is applied to the final operational amplifier (B4), which is used as a voltage comparator. The threshold level is set by a potentiometer (R13). The comparator is used to switch from 5 VDC to 0 VDC upon detecting the scanned electron beam from the monitor. The output of B4 is normally high. When the amplified signal from the photodetector is greater than the present threshold on the comparator, the comparator will go low. When observed with an oscilloscope, the output of the light pen appears as a periodic pulse train, with pulses going from a logical one to a logical zero.

Subsequent to the completion of the JMACS project, the Naval Training Systems Center modified the circuitry of the light pen slightly (see Figure 3). These design improvements were found to improve its output signal stability and ease of calibration. Documentation related to the design of the light pen's circuit board and mechanical drawings of the light pen housing are on file at the Advanced Simulation Concepts Laboratory of the Naval Training Systems Center.

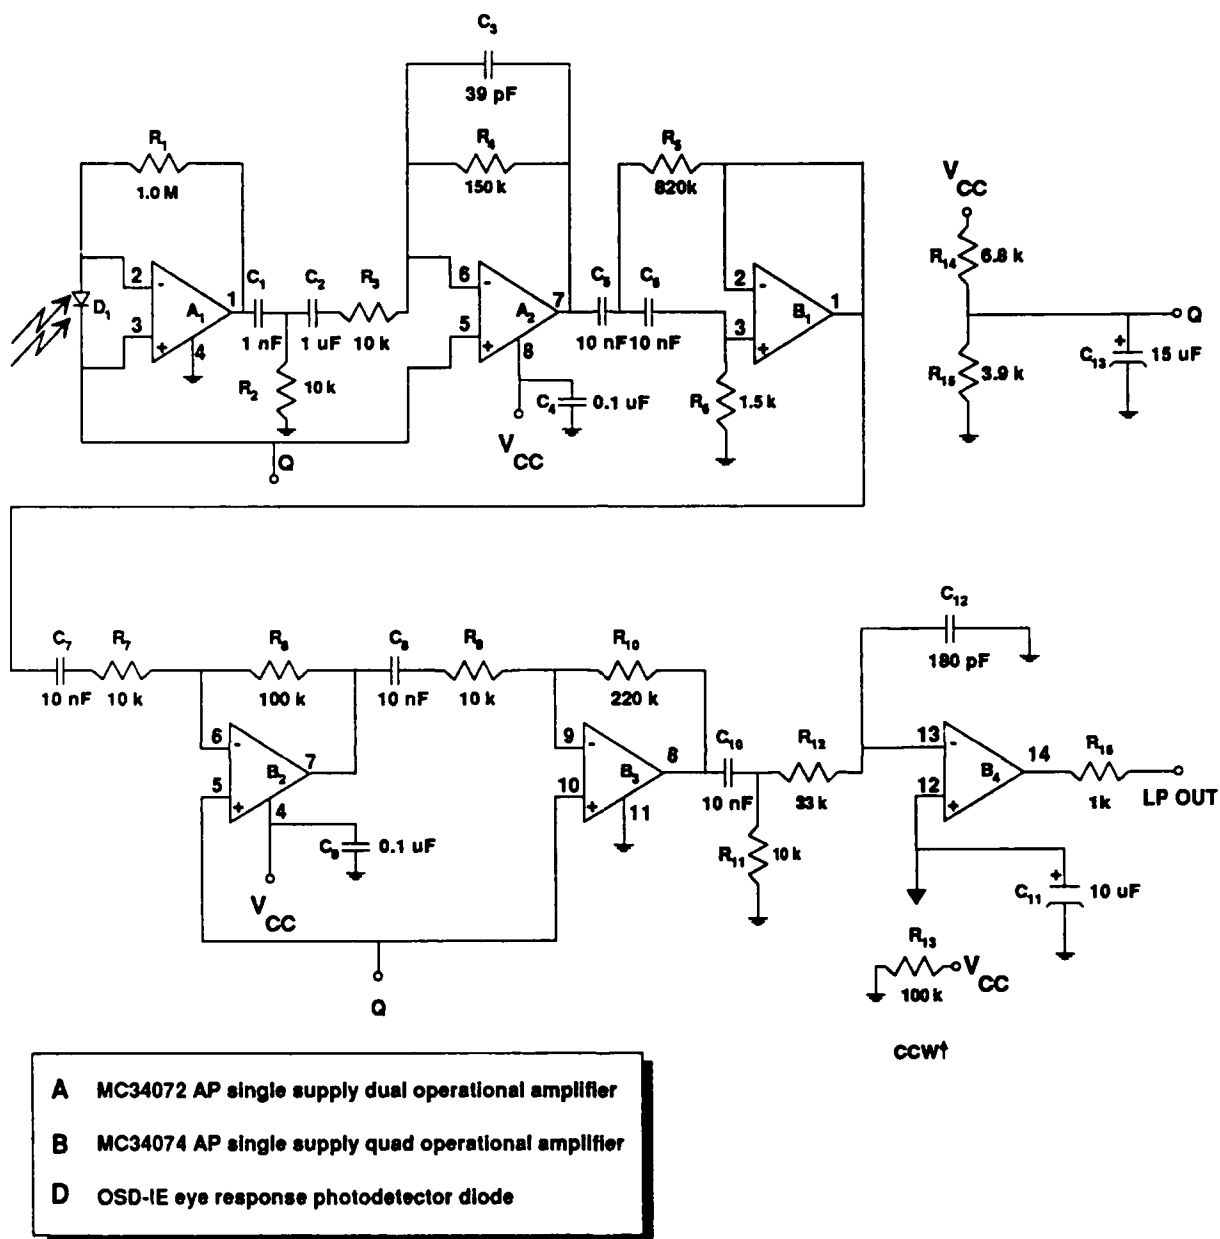

**Figure 2. Schematic of the Naval Training Systems Center long-distance light pen (5 VDC power supply).**

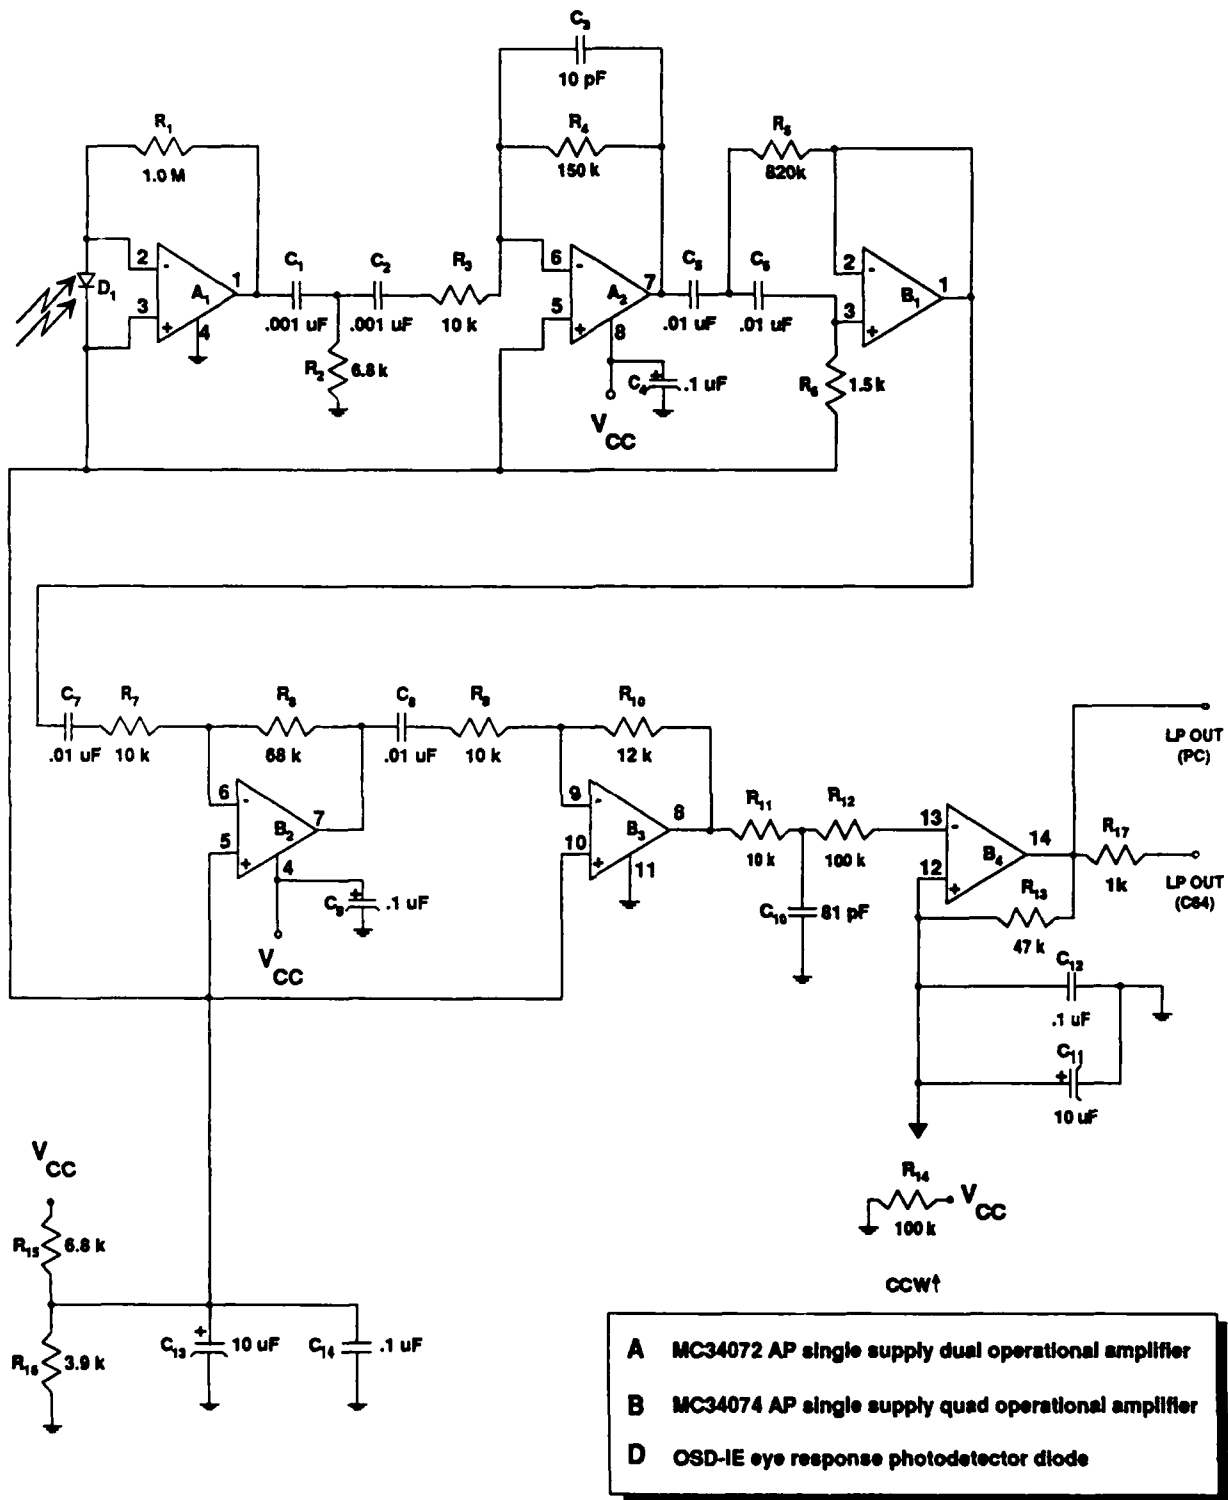

**Figure 3. Schematic of the Naval Training Systems Center improved long-distance light pen (5 VDC power supply).**

### Light Pen Mount

The Naval Training Systems Center also designed a light pen mount for the M16A1 rifle. Made of anodized aluminum, the mount is designed to position the light pen above the barrel and in front of the front sight assembly. Although the mount is connected to the bayonet stud, to prevent rotation around the barrel, it does permit the light pen to be aligned with the sights in both the vertical and horizontal axes. Mechanical drawings of the light pen mount for the M16A1 rifle are on file at the Advanced Simulation Concepts Laboratory of the Naval Training Systems Center.

### Rifle and Trigger Switch

Demilitarized M16A1 rifles were obtained from the Anniston Army Depot for the JMACS project. Retaining their metallic lower receivers, these rifles offered greater durability and realism than previously used mock-up rifles whose lower receivers were made of injection-molded plastic. Within the upper receiver of each demilitarized rifle an Arrow Hart single-pole single-throw switch (model #83090-C) was installed in an opposing position to the trigger in the lower receiver. Complete documentation on the trigger switch and its wiring has been provided in an earlier report (Hunt et al., 1987).

### **Software Design**

MACS software for Basic Rifle Marksmanship (BRM) training evolved over a period of several years, as did MACS hardware in general (see Evans, 1988). The version of MACS BRM software that was used in the JMACS project introduced several features that had not been available in earlier versions. This fourth-generation software featured ten levels of instruction, arranged in an ascending hierarchy of difficulty. After an initial skill test determined the most appropriate starting level for each firer, the program branched automatically between levels based on firer performance. The amount and type of performance feedback also was geared to firer performance and instructional level, with performance feedback maximized in the earlier levels and gradually decreased at the higher, more difficult, levels. Seven major types of performance feedback were featured in this software:

1. crosshairs indicating the location of hits and misses
2. descriptive diagnostic scores based on normative performance standards for various marksmanship fundamentals
3. an animated replay of a shot comparing the firer's actual sight picture with the correct sight picture
4. a screen border that changed color when performance standards were not met
5. a whistle sound indicating the failure to fire within a prescribed time limit

6. summary tables of the number of hits, misses, and "no fires" obtained at each target range
7. delayed recall of the locations of previously-fired shots, shown as a collective group of shots at each target range.

This performance feedback package, together with associated internal performance standards, made self-paced MACS instruction possible for the first time. In addition to its evaluation in the Navy and Air Force as part of the JMACS project (see Evans, 1988; Heller & Evans, 1989), the fourth-generation software also was evaluated for its training effectiveness in two subsequent U.S. Army Infantry Board (USAIB) Concept Evaluation Program (CEP) tests (USAIB, 1987, 1988). With the exception of the BASIC program listing and accompanying 6510 assembler source code, which is presented in Appendix A, detailed documentation of this software has been presented in an earlier report (Hunt, Broom, & Greene, 1988).

Recently a fifth generation of MACS software was developed, largely in response to shortcomings identified in the aforementioned tests and in later research (Broom et al., 1989). While similar to fourth-generation software in most respects, the fifth-generation software for BRM training differed in four areas. First, the diagnostic performance measures were revised to make them more sensitive to small firing errors and more consistent with the marksmanship fundamentals taught in U.S. Army BRM training. Second, many new information screens were added to enhance student understanding of program features in less-than-ideal training environments, where knowledgeable instructors may be unavailable in sufficient quantity. Third, one instructional level was removed from the program because its performance feedback was found to be confusing to some students. Fourth, optional instructional programs requiring the use of joysticks were revised so that the same concepts could be taught without the need for joysticks in the MACS hardware configuration. Complete documentation of fifth-generation software has been presented separately (Broom et al., 1989). A trainer's guide to accompany this software also has been developed (Purvis & Wiley, 1989).

### **Lessons Learned in Hardware and Software Development**

In addition to previously mentioned specific improvements in light pen and software design initiated as a result of product testing and user feedback, several general lessons were learned during the course of hardware and software development that should be of interest to others working in the area of marksmanship simulation. First, simulated recoil was not incorporated into the MACS hardware configuration, despite the belief by some instructors that it is an important feature of any rifle marksmanship simulator. Consistent with earlier findings in the areas of classical conditioning and simulator fidelity, subsequent experimentation found that MACS performance did not vary as a function of recoil (Evans, 1989). Evans (1989) concluded that the accurate reproduction of recoil may be unnecessary in rifle marksmanship simulation, particularly if simulation is used in conjunction with live firing in an overall training strategy. In the case of MACS, it is estimated that the addition of recoil would at least double the cost of the system, with no expectation of any greater training effectiveness. Similar reasoning precluded the development of a realistic firing noise feature for MACS, though this issue was not investigated experimentally.

Another lesson learned was that some software features commonly found in video arcade games can dramatically increase student interest and system usage. For example, a software routine allowing high scorers to enter and display their initials was introduced in a five-target demonstration program used in MACS briefings and exhibitions. Prior to the introduction of the high scorer routine, most users would only fire the program once or twice, which was sufficient to become familiar with the major capabilities and features of the MACS rifle system. After the introduction of the high scorer routine, however, many users could be observed firing the program repeatedly (sometimes dozens of times) without any evidence of boredom. Due to the increased system usage and apparent competitive interest that resulted from the introduction of the high scorer routine in the demonstration program, a "top gun" routine for high scorers was added to the fifth-generation software for basic rifle marksmanship training (Broom et al., 1989; Purvis & Wiley, 1989).

Finally, it was learned that user acceptance sometimes can be influenced more by organizational factors than by factors solely related to the hardware and software features of a system. This was most apparent in a pair of U.S. Air Force training effectiveness evaluations conducted by Butzin as part of the JMACS project (cited in Evans, 1988). In these evaluations, a questionnaire administered to two groups of instructors yielded quite different opinions of MACS. Specifically, instructors in a one-week training program with a relatively low student throughput held much higher opinions of MACS hardware and software features than did instructors in a one-day training program having a relatively high student throughput. This disparate finding was largely attributable to the greater difficulty instructors in the one-day program experienced finding available time to integrate MACS training with their existing training.

### **Commercial Availability and Product Utilization**

The U.S. Army Research Institute and the Naval Training Systems Center jointly provided 25 MACS systems to the Army (5 systems), Navy (10 systems), and Air Force (10 systems) for evaluation as part of the JMACS project. Since the conclusion of the project, these systems have been used for training within each service. Using the Naval Training Systems Center's light pen design, the Fort Gordon Training Support Center assembled over 100 additional MACS systems to support subsequent Army testing (USAIB, 1987, 1988). Since the conclusion of this testing, these systems also have been used in training at the U.S. Military Academy and Forts Benning, Jackson, Richardson, and Wainwright. Several of these systems were also used to support informal evaluations by services within allied nations and by other U.S. Army organizations.

Due to continuing interest in MACS technology, the U.S. Army has assembled and fielded over 300 production systems, at the present time, to requesting units and schools through the Fort Benning Training Support Center. These production systems were the first MACS systems in which all hardware components were obtained commercially. The Fort Benning Training Support Center developed contract specifications necessary to obtain preassembled light pen, mount, and replica M16A1 rifle packages, with the light pen based on the Naval Training Systems Center circuit design (see Figure 2). Two commercial firms have manufactured these packages to date: the BETAC Corporation of Arlington, Virginia, and Firearms Training Systems (FATS) of Norcross, Georgia. Commodore 64C microcomputers and 1802 monitors were obtained commercially on the open market. All



program cartridge components were obtained from the Jason-Ranheim Company of Auburn, California.

At a total cost of \$950 per system (plus shipping) to requesting units and schools, the Fort Benning Training Support Center obtains all MACS hardware commercially, performs quality control checks on the equipment, duplicates a MACS BRM program cartridge from a master set of fifth-generation EPROMs (Broom et al., 1989), prints a trainer's guide (Purvis & Wiley, 1989), and then prepares the completed system for shipping. The Fort Benning Training Support Center also has Spanish language versions of the MACS BRM program and trainer's guide on file, with translation having been provided by the U.S. Army School of the Americas.

## References

- Broom, J. M., Champion, D. F., Greene, W. H., Martere, R. F., Purvis, J. W., & Sills, E. G. (1989). Multipurpose arcade combat simulator (MACS) basic rifle marksmanship (BRM) program (ARI Research Product 90-01). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A214 459)
- Evans, K. L. (1988). Development and evaluation of the multipurpose arcade combat simulator: A research summary (ARI Research Report 1488). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD B130 099)
- Evans, K. L. (1989). Effects of recoil on rifle marksmanship simulator performance (ARI Technical Report 828). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A206 984)
- Heller, F. H., & Evans, K. L. (1989). Joint service multipurpose arcade combat simulator (JMACS) user guide (ARI Research Product 89-23). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A212 773)
- Hunt, J. P., Broom, J. M., & Greene, W. H. (1988). Multipurpose arcade combat simulator (MACS): Year three report (ARI Research Note 88-86). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A199 468)
- Hunt, J. P., Broom, J. M., Greene, W. H., Crawford, J. W., Martere, R. F., & Parish, J. R. (1987). Multipurpose arcade combat simulator (MACS): Year two report (ARI Research Note 87-34). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A184 179)
- Purvis, J. W., & Wiley, E. W. (1989). Trainer's guide: Multipurpose arcade combat simulator (MACS) basic rifle marksmanship (M16 rifle) (ARI Research Product 90-03). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences.
- Schroeder, J. E. (1984). A multipurpose arcade combat simulator (MACS) (ARI Technical Report 629). Alexandria, VA: U.S. Army Research Institute for the Behavioral and Social Sciences. (AD A156 795)
- Schroeder, J. E. (1986). Light pen marksmanship trainer (U.S. Patent No. 4,583,950, April 22, 1986).
- U.S. Army Infantry Board. (1987). Concept evaluation program (CEP) test of MACS device/LOMAH training (MACSD/LT) (USAIB Project No. 3868). Fort Benning, GA: Author.
- U.S. Army Infantry Board. (1988). Concept evaluation program test of the M16 rifle Gowen South: Phase III (USAIB Project No. 3881). Fort Benning, GA: Author. (AD B124 423L)

## **Appendix A**

**BASIC Program Listing and 6510 Assembler Source Code for  
Fourth-Generation Basic Rifle Marksmanship Software**

```

10 POKE 808,237:V=53248:POKE 53281,0:POKE V+21,0:B$="" :SL=1:EL=10
20 DIM SD$(25,3),CR$(9,3),H$(8),DA$(6,10):I1=43640:I2=43984:NU=0:EL=0:CS=0
30 DEF FNH(X)=INT(X/256):DEF FNL(X)=X-INT(X/256)*256
40 DEF FNW(X)=PEEK(X)+PEEK(X+1)*256:DEF FNZ(X)=INT((ABS(X>0)*X)+.5):C=2
45 POKE 56579,143:POKE 56577,0
50 RK=256:EN=3400:DS=3403:RT=3406:SV=3409:BW=3415:SC=3421:DV=3430:LC=3433
60 GP=3436:CO=3439:WH=3442:FA=3445
70 GET A$:IF A$="" THEN 70
80 IF A$=" " THEN POKE 53280,0:SYS DS:GOTO 130
90 IF A$="m" THEN SYS DS:GOSUB 3030:GOTO 130
100 B$=RIGHT$(B$,1)+A$:IF (B$<>"ca") AND (B$<>"pf") THEN 70
110 Z=1:IF B$="pf" THEN Z=2
120 SYS DS:POKE 53265,27:POKE 53272,23:PRINT"(CLR)":POKE 49161,2:SYS 45179
130 IF RK=256 THEN 210
140 A$="(F3)09(F6)00(F5)00(F7)00(CLR){LBU}(F2)0504(F1)Welcome to (RED)MACS(LBU){F3}00":GOSUB 2830:BC$="(F6)00"
150 POKE 53281,0:FOR I=0 TO 9:FOR J=0 TO 3:READ CR$(I,J):NEXT J,I
160 FOR I=1 TO 6:FOR J=0 TO 4:READ DA$(I,J):NEXT J,I
170 Z=0:SB=15:GOSUB 5240:RK=Z
180 IF RK=0 THEN 210
190 POKE 53265,27:POKE 53272,23:INPUT"(CLR)Date":A$:IO$=LEFT$(A$,8)+CHR$(13)
200 INPUT"Unit":A$:IO$=IO$+LEFT$(A$,20)+CHR$(13)
210 S1=32768:S2=10:POKE 929,0:CL=0:MO$="a":GOSUB 1000:IF CL=EL THEN CL=EL
220 IF CL<SL THEN CL=SL
230 GOSUB 2950:IF CL=0 THEN 210
240 IF (MI AND 16) THEN MI=INT(RND(1)*5):WI=16+((MI-(MI-4)*2))+((INT(RND(1)*8)*32)
250 POKE 929,WI:ON CL GOSUB 1480,1480,1680,1680,1990,1990,1990,1990,2330
260 MO$="a":IF (CL<EL) AND (SL<EL) THEN 220
270 A$="(F3)09(F6)05(CLR){F5}05(F7)05(BLK){F2}0502(F1)CONGRATULATIONS(F8){F8} You are finished(F8) with this "
280 A$=A$+"program.(F8){F8} Call instructor.(F1){F2}0723Press SPACEBAR to continue(F3)00"
290 GOSUB 2830:CL=0:POKE 198,0:RESTORE:GOTO 70
1000 IF RK=0 THEN 1020
1010 POKE 53272,23:POKE 53265,27:INPUT"(CLR){WHT}Firer ID #":ID$:ID$=LEFT$(ID$,20)
1020 POKE 2040,34:POKE 2047,37:POKE V+14,10:POKE V+15,130:POKE V+39,0
1030 POKE V+46,12:POKE V,21:POKE V+1,145:POKE V+16,129:POKE V+23,0:POKE V+29,0
1040 POKE 53265,43:A$="(F6)00(F5)13(F7)00(CLR){F1}(BLK){F2}0701The following(F2)0103targets are untimed"
1050 A$=A$+"(F8){F8} Aim at the(F8) center of the(F8) target as(F8) the black dot(F8) shows(F1)"
1060 TN=0:POKE V+21,129:A$=A$+"(F2)0723Pull trigger to continue(F3)00":GOSUB 2830
1070 IF PEEK(56321)=247 THEN 1100
1080 GET A$:IF A$<>"q" THEN 1070
1090 TN=-1
1100 POKE 899,42:POKE 883,60:POKE 838,0:FOR Z=834 TO 837:POKE Z,0:NEXT Z
1110 OX=0:OY=0:POKE 838,0:POKE 889,0:POKE 890,160:POKE 891,40:POKE 892,180
1120 POKE 823,0:POKE 824,0:POKE 821,17:POKE 822,0:SB=6:GOSUB 5230:S=0
1130 IF (S<0) AND (S<3) THEN 1150
1140 FOR Z=0 TO 3:SD$(Z)=0:NEXT Z:PS=INT(S/3):GOSUB 2750:GOSUB 2840
1150 POKE 876,0:POKE 877,205:X=((INT(RND(1)*75))*2)+71:IF TN THEN X=165
1160 POKE 52481,X:GOSUB 2810
1170 Z=-20352:SB=0:GOSUB 5240:POKE V+21,0:IF Z=128 THEN 1150
1180 IF S<3 THEN OX=OX+((X+11)-FNW(847)):OY=OY+((165-FNW(849)))
1190 N=FNW(907):N=N+(N>128)*(N-128):GOSUB 2500:SD$(S,0)=FNZ(100-SD*C)
1195 SD$(25,0)=SD$(25,0)+SD$(S,0)
1200 GOSUB 2540:SD$(S,1)=FNZ(100-SD*C):SD$(25,1)=SD$(25,1)+SD$(S,1)
1210 GOSUB 2580:SD$(S,2)=FNZ(100-SD*C):SD$(25,2)=SD$(25,2)+SD$(S,2)
1220 GOSUB 2810:IF S<2 THEN 1280
1230 OX=INT((OX/3)+1):OX=INT(OX/2)*2:OY=INT((OY/3)+0.5)
1235 X=OX-(OX<0)*65536:Y=OY-(OY<0)*65536
1240 POKE 834,FNL(X):POKE 835,FNL(X):POKE 836,FNL(Y):POKE 837,FNL(Y)
1250 POKE 785,FNL(LC):POKE 786,FNL(LC)
1260 FOR Z=0 TO 2:SD=USR(Z+128):SD$(Z,3)=FNZ(100-SD*C)
1270 SD$(25,3)=SD$(25,3)+SD$(Z,3):NEXT Z:Z=43640:GOSUB 4570:IF Z=128 THEN 1100
1280 S=S+1:IF S<6 THEN 1130
1290 POKE 53265,43:POKE 785,FNL(LC):POKE 786,FNL(LC)
1300 FOR Z=3 TO 5:SD=USR(Z):SD$(Z,3)=FNZ(100-SD*C):SD$(25,3)=SD$(25,3)+SD$(Z,3)
1310 NEXT Z:Z=43664:GOSUB 4570:IF Z=128 THEN 1100
1320 N=6:T=0:GOSUB 4920
1330 PS=0:B=0:E=2:GOSUB 2900:IF (Z=0) OR (EL<2) THEN CL=1:RETURN
1340 PS=1:B=3:E=5:GOSUB 2900:IF (Z=0) OR (EL<3) THEN CL=2:RETURN
1350 A$="(F3)09(F5)00(F7)00(CLR){F1}(LBU){F2}0703The following(F2)0306targets are timed(F2)1211ASSUME "
1360 A$=A$+"(F2)1114SUPPORTED(F2)1217POSITION(F1)":GOSUB 2790:GOSUB 5220
1370 POKE 838,0:POKE 889,0:POKE 890,160:POKE 891,40:POKE 892,180:POKE 876,0
1380 POKE 877,205:POKE 823,17:POKE 824,0:POKE 821,114:POKE 822,0:SB=6:GOSUB 5230
1390 POKE 899,1:GOSUB 2840:B=0:E=2:T=1
1400 FOR S=B TO E
1410 SB=0:Z=-20352:GOSUB 5240:POKE V+21,0
1420 IF (Z>63) THEN SYS WH:FOR Z=0 TO 3:SD$(S,Z)=0:NEXT Z:GOTO 1440
1430 N=FNW(907):N=N+(N>128)*(N-128):GOSUB 2600
1440 GOSUB 2810:NEXT S:GOSUB 2900:IF (Z<0) AND (EL>(T+2)) THEN 1460
1450 N=6:GOSUB 4920:CL=T+2:RETURN
1460 T=T+1:IF T=2 THEN PS=1:GOSUB 2750:GOSUB 2840:B=3:E=5:GOTO 1400
1470 N=6:GOSUB 4920:CL=5:RETURN
1480 NT=3:PS=CL-1:GOSUB 2750:GOSUB 5220:POKE 876,0:POKE 877,205:POKE 889,0
1490 POKE 890,160:TN=0:POKE 891,40:POKE 892,180:POKE 838,0:POKE 899,1
1500 IF (EE=0) OR (CL<1) THEN 1530
1510 FOR Z=0 TO NT*6-1:POKE 16325+Z,4:NEXT Z:POKE 16325+NT*6,255
1520 POKE 821,0:POKE 823,114:POKE 824,0:SB=3:GOSUB 5230:GOTO 1540
1530 POKE 823,114:POKE 824,0:POKE 821,225:POKE 822,0:SB=6:GOSUB 5230
1540 S1=32768:S2=10:IR=-32640-(CS*4096):H=0:TN=TN+1:RP=0:IF TN=7 THEN 1670
1550 GOSUB 2630
1560 S=PEEK(838):GOSUB 2840:A$="L"+STR$(CL)+"T="+STR$(S+1)+"R="+STR$(RP)
1570 GOSUB 5100:POKE IZ+7+S*8,RP:X=((INT(RND(1)*65))*2)+71:AD=FNW(876)
1580 POKE AD+1,X:Y=PEEK(AD+2):POKE AD+6,255:TJ=PEEK(AD+11):TJ=TJ+(TJ>127)*256
1590 IF (TN=1) AND ((EE=0) OR (CL<1)) THEN POKE AD+15,X+48:POKE AD+20,255
1600 GOSUB 3480:SB=0:Z=IR:GOSUB 5240:POKE 876,0:IF Z=128 THEN 1670
1601 IF CS=0 THEN 1620
1602 A$="(F2)0423(BLK){SWLC}{F1}Call your shot":Z1=TI+359
1603 Z2=INT((Z1-TI)/60):A$=A$+"(F2)3423"+STR$(Z2):GOSUB 2830:A$="(F1)"
1604 IF Z2>0 THEN 1603
1605 POKE V+21,PEEK(V+21) OR 1
1620 IF PEEK(900)<128 THEN H=H+1
1630 GOSUB 3500:IF Z=128 THEN 1670
1640 S=S+1:IF S/3<>INT(S/3) THEN POKE 876,H*(2):POKE 877,H*(3):GOTO 1560
1650 N=3:Z=1+H*(1)*8:GOSUB 4080:IF H>1 THEN BC=0:GOTO 1540
1660 GOSUB 2650:IR=-31616-(CS*4096):RP=RP+1:H=0:GOSUB 5080:GOTO 1560
1670 POKE V+21,0:GOSUB 3760:GOSUB 4920:CL=CL+A:RETURN
1680 RP=0:PS=CL-3:NT=4:GOSUB 2750:POKE 53265,43:GOSUB 5220:IR=-32640
1690 B=0:E=NT*6-1:GOSUB 3890
1700 AD=I1:FOR Z=1 TO NT*6:POKE AD,255:AD=AD+8:NEXT Z:S1=37445:S2=10
1710 FOR Z=B TO E:POKE 16325+Z,INT(PEEK(16325+Z)/NT):NEXT Z:FOR Z=1 TO 6

```

```

1720 DA%(Z,5)=0:DA%(Z,6)=0:NEXT Z:FOR Z=11 TO 11+199 STEP 8:POKE Z,0:NEXT Z
1730 POKE 821,0:POKE 823,114:POKE 824,0:SB=3:GOSUB 5230:POKE 876,0:POKE 877,205
1740 I=0:GOSUB 2840
1750 I=I+1:IF I>NT*6 THEN 1790
1760 GOSUB 4370:POKE V+21,0:IF Z=128 THEN 1930
1770 IF Z=64 THEN SYS WH
1780 GOTO 1750
1790 FOR TN=1 TO 6:Z=I1+(TN-1)*32:N=4:GOSUB 4080:NEXT TN
1800 POKE 53265,43:RP=RP+1:ER=0:TN=1
1810 Z1=3:IF (CL=4)AND(TN>4) THEN Z1=2
1820 IF DA%(TN,5)>21 THEN 1910
1830 ER=-1:IR=-31616:POKE 821,0:POKE 823,114:POKE 824,0:GOSUB 5080
1840 AD=I1+(TN-1)*32:FOR Z=1 TO 4:POKE AD,255:AD=AD+8:NEXT Z
1850 FOR Z=0 TO NT-1:POKE 16325+Z,TN-1:NEXT Z:POKE 16325+NT,255:SB=3:GOSUB 5230
1860 POKE 876,0:POKE 877,205:DA%(TN,5)=0:DA%(TN,6)=0:GOSUB 2840
1870 GOSUB 4370:POKE V+21,0:IF Z=128 THEN 1930
1880 IF Z=64 THEN SYS WH
1890 I=FNL(I+1):IF DA%(TN,6)<NT THEN 1870
1900 Z=I1+(TN-1)*32:N=4:GOSUB 4080
1910 TN=TN+1:IF TN<7 THEN 1810
1920 IF ER THEN 1800
1930 POKE V+21,0:FOR J=0 TO 3:SD%(25,J)=0:NEXT J
1940 N=0:FOR TN=1 TO 6:IF DA%(TN,6)=0 THEN 1970
1950 FOR I=1 TO DA%(TN,6):S=(TN-1)*NT+(I-1):N=N+1
1960 FOR J=0 TO 3:SD%(25,J)=SD%(25,J)+SD%(S,J):NEXT J,I
1970 NEXT TN:A=0:BC=0:IF N>0 THEN GOSUB 3790
1980 GOSUB 4920:CL=CL+A:RETURN
1990 PS=0:GOSUB 2750:GOSUB 5220:RP=0:IR=512
2000 S1=38042:S2=1:IF CL>7 THEN S1=37968:S2=3
2010 POKE 53265,43:SB=0:Z=15:GOSUB 3890:POKE 876,0:POKE 877,205:POKE 889,0
2020 POKE 890,160:POKE 891,40:POKE 892,180:POKE 893,0:POKE 899,20:POKE 910,0
2030 POKE 933,0:POKE 934,0
2040 POKE 912,0:TN=0:POKE 821,0:POKE 823,225:POKE 824,0:SB=3:GOSUB 5230
2050 GOSUB 3950:A=2:POKE 12+7,RP:HI=0:N=PEEK(838):IF (N=0) AND (A<128) THEN 2080
2060 AS="(F3)09(F6)00(CLR)(F5)00(F7)00(LBLU)(F2)0601SUMMARY: Supported Position":GOSUB 4190
2070 HI=21:MI=22:NF=23:AC=24:IF A=128 THEN BC=0:GOSUB 4920:RETURN
2080 FOR TN=1 TO 6:Z=I1+160:GOSUB 4080:NEXT TN
2090 IF HI<15 THEN IR=1536:RP=RP+1:GOSUB 5080:GOTO 2010
2100 POKE 881,AC:GOSUB 4920:BC=0
2110 PN=PEEK(912):N=16:RP=0:PS=1:GOSUB 2750:POKE 899,40:POKE 53265,43:IR=512
2120 B=16:Z=28:GOSUB 3890:POKE 876,0:POKE 877,205:POKE 889,176:POKE 890,164
2130 POKE 891,184:POKE 892,181:POKE 893,20:POKE 910,0:POKE 912,0
2140 POKE 933,2:POKE 934,0
2150 POKE 821,16:POKE 823,225:POKE 824,0:SB=3:GOSUB 5230:GOSUB 3950:A=2
2160 POKE 12+167,RP:HI=0:N=PEEK(838)-20:IF (N=0) AND (A<128) THEN 2180
2170 AS="(F3)09(F6)00(CLR)(F5)00(F7)00(LBLU)(F2)0601SUMMARY: Unsupported Position":GOSUB 4190
2180 HI=21:MI=22:NF=23:AC=24:IF A=128 THEN BC=0:GOSUB 4920:RETURN
2190 FOR TN=1 TO 6:Z=I1+160:GOSUB 4080:NEXT TN
2200 IF HI<15 THEN IR=1536:RP=RP+1:GOSUB 5080:TN=16:GOTO 2110
2210 POKE 881,24:GOSUB 4920
2220 POKE V+21,0:HI=0:MI=0:NF=0:AS="(F3)09(F6)00(CLR)(F5)00(F7)00(LBLU)(F2)1401FINAL SCORES"
2230 AS=AS+(F2)1303(GRN)Hits(F2)2199(RED)Misses(YELO)(F2)2999No Fires(F8)(F8):GOSUB 2830
2240 FOR I=1 TO 6:Z=DA%(I,5)+DA%(I,8):AS="(LBLU)(F2)0599"+STR$(I*50)+"(F2)1399(GRN)+STR$(Z)
2250 HI=HI+Z:Z=DA%(I,6)+DA%(I,9):AS=AS+(F2)2299(RED)+STR$(Z):MI=MI+Z
2260 Z=DA%(I,7)+DA%(I,10):AS=AS+(F2)3299(YELO)+STR$(Z)+"(F8)(F8)":NF=NF+Z:GOSUB 2830:NEXT I
2270 AS="(F2)0699(LBLU)TOTAL(F2)1399(GRN)+STR$(HI)+"(F2)2299(RED)+STR$(MI)+"(F2)3299(YELO)+STR$(NF)
2280 AC=INT(((AC+Z4)/2)+.5):Z4=AC:Z5=9:GOSUB 2680:AS=AS+(F8)(F8)(LBLU)(F2)0699Penalties:"
2290 AS=AS+STR$(PEEK(912)+PN)
2300 IF PEEK(838)>0 THEN AS=AS+"(F8)(F2)0699Your accuracy was "+RIGHT$(CR$,LEN(CR$)-5)
2310 AS=AS+(WHT)":GOSUB 2790
2320 IF Z>2 THEN BC=0:CL=CL+1:RETURN
2330 IF Z=1 THEN A=(CL>SL):BC=6-A:CL=CL+A:BS="(F2)1499a poor":GOTO 2320
2340 BC=6:BS="(F2)0599a below average"
2350 AS="(F3)09(CLR)(RED)(F1)(F8)(F8) You are being sent(F8)(C/RT) back to level"+STR$(CL)
2360 AS=AS+(F8) because you have(F8)+"B$+(F8)(F2)0699accuracy score(F1)(WHT)":GOSUB 2790:RETURN
2370 PS=0:GOSUB 2750:POKE 53280,0:RP=0:S1=37968:S2=3:GOSUB 5220:IR=640
2380 POKE 876,0:POKE 877,205:POKE 889,0:POKE 890,160
2390 TN=0:POKE 891,40:POKE 892,180:POKE 893,0:POKE 899,40:POKE 912,0
2400 POKE 823,145:POKE 824,3:POKE 821,59:POKE 822,6:SB=6:GOSUB 5230
2410 GOSUB 2840:AS="L=10:IT= 0:R="+STR$(RP):GOSUB 5100:POKE 933,0:POKE 934,0
2420 POKE 12+7,RP:SB=0:Z=IR:GOSUB 5240:A=2
2430 POKE V+21,0:POKE 53280,0:N=PEEK(838):IF N=0 THEN GOSUB 4920:RETURN
2440 BS="Supported Position":IF PS THEN BS="Unsupported Position"
2450 AS="(F3)09(F6)00(CLR)(F5)00(F7)00(LBLU)(F2)0601SUMMARY: "+B$:N=PEEK(838):GOSUB 4710
2460 IF A=128 THEN BC=0:GOSUB 4920:RETURN
2470 FOR TN=1 TO 6:Z=I1:GOSUB 4080:NEXT TN
2480 IF HI<(23+ABS(PS-1)*5) THEN IR=1664:RP=RP+1:GOSUB 5080:GOTO 2340
2490 BC=0:GOSUB 4920:RP=0:IF PS=1 THEN CL=11:RETURN
2500 PS=1:GOSUB 2750:IR=640:GOTO 2340
2510 POKE 785,FNL(DV):POKE 786,FNH(DV):AD=43008+(S AND 1)*128
2520 N1=-60*(CL<3)-45*(CL=3):IF (CL=0) AND (T>0) THEN N1=45
2530 IF N<(N1+2) THEN SD=999:RETURN
2540 N1=(N-N1)*256+(N-19):GOTO 2560
2550 IF N<18 THEN SD=999:RETURN
2560 N1=(N-18)*256+(N-1)
2570 POKE 253,FNL(AD):POKE 254,FNH(AD):SD=USR(N1)
2580 POKE 253,FNL(AD+256):POKE 254,FNH(AD+256):SD=SD+USR(N1):RETURN
2590 POKE 253,0:POKE 254,170:SD=USR(262):POKE 253,30:SD=SD+USR(262):RETURN
2600 GOSUB 2500:SD4(S,0)=FNZ(100-SD*C):GOSUB 2540:SD4(S,1)=FNZ(100-SD*C)
2610 GOSUB 2580:SD4(S,2)=FNZ(100-SD*C):POKE 785,FNL(LC):POKE 786,FNH(LC)
2620 SD=USR(S):SD4(S,3)=FNZ(100-SD*C):RETURN
2630 H4(1)=PEEK(838):H4(2)=PEEK(876):H4(3)=PEEK(877):H4(4)=PEEK(889)
2640 H4(5)=PEEK(890):H4(6)=PEEK(891):H4(7)=PEEK(892):H4(8)=PEEK(899):RETURN
2650 POKE 838,H4(1):POKE 876,H4(2):POKE 877,H4(3):POKE 889,H4(4)
2660 POKE 890,H4(5):POKE 891,H4(6):POKE 892,H4(7):POKE 899,H4(8):RETURN
2670 Z4=SD4(S,J):Z5=J+PS*4
2680 CR$="(F2)2299(GRN)excellent":Z=5:IF Z4<CR4(25,0) THEN CR$="(F2)3299(BLUE)good":Z=4
2690 IF Z4<CR4(25,1) THEN CR$="(F2)2699(BRN)average":Z=3
2700 IF Z4<CR4(25,2) THEN CR$="(F2)2299(YELO)below avg":Z=2
2710 IF Z4<CR4(25,3) THEN CR$="(F2)3299(RED)poor":Z=1
2720 IF (CL<0) OR (NU=0) THEN RETURN
2730 BS=STR$(Z4):Z4=LEN(BS):IF Z4<4 THEN FOR Z5=1 TO 4-Z4:BS=BS+" ":NEXT Z5
2740 CR$="(F1)(F2)2499"+MID$(CR$,6,10)+"(F2)3599"+BS+(F1)(F8)":RETURN
2750 POKE V+21,0:AS="(F3)09(CLR)(F6)00(F5)00(WHT)(F1)"
2760 IF PS THEN AS=AS+(F2)1108ASSUME AN(F2)0911UM":GOTO 2780
2770 AS=AS+(F2)1120ASSUME A(F2)1111"
2780 AS=AS+"SUPPORTED(F2)1214POSITION(F1)"
2790 AS=AS+(F2)0723<pull trigger to continue>(F3)00":GOSUB 2830

```

```

2800 IF PEEK(56321)<>247 THEN 2800
2810 IF PEEK(56321)<>255 THEN 2810
2820 RETURN
2830 AS=AS:SYS 3424:RETURN
2840 POKE 253,FNL(S1):POKE 254,FNH(S1):POKE 251,S2:SYS SC:RETURN
2850 REM GET AVERAGE ACROSS B-E SHOTS FOR EACH DIAGNOSTIC SCORE
2860 FOR Z2=0 TO 3:SD%(12,Z2)=0:NEXT Z2
2870 FOR Z1=B TO E:FOR Z2=0 TO 3:SD%(12,Z2)=SD%(12,Z2)+SD%(Z1,Z2):NEXT Z2,Z1
2880 Z=(Z-B)+1:FOR Z2=0 TO 3:SD%(12,Z2)=INT((SD%(12,Z2)/Z)+.5):NEXT Z2:RETURN
2890 REM ROUTINE TO SEE IF SHOTS B-E FALL INTO RANGE FOR ADVANCEMENT
2900 GOSUB 2860:S=12:J=3:GOSUB 2670:IF Z<>5 THEN Z=0:RETURN
2910 J=0:GOSUB 2670:Z1=Z:J=1:GOSUB 2670
2920 IF (Z<>5) OR (Z1<4) AND ((Z1<>5) OR (Z<4)) THEN Z=0:RETURN
2930 J=2:GOSUB 2670:IF Z<3 THEN Z=0:RETURN
2940 Z=1:RETURN
2950 AS="(F3)09(F6)00(CLR)(F5)00(F7)00(F1)(LBLU)(F2)1505LEVEL(F2)1709":B$=STR$(CL):Z=CL+(CL-10)*10
2960 IF CL=10 THEN B$="(C/RT)10"
2970 AS=AS+B$+(GRN)(F2)0015":GOSUB 2830:POKE 823,CL:SB=18:GOSUB 5230
2980 AS="(RED)(F2)0723<pull trigger to continue>(F3)00":GOSUB 2830
2990 IF PEEK(56321)=247 THEN RETURN
3000 IF PEEK(56321)<>127 THEN 2990
3010 GOSUB 3030:IF CL=0 THEN RETURN
3020 GOTO 2950
3030 POKE 53265,43:POKE 53272,31:POKE 198,0:AS="(F6)00(F5)00(F7)00(CLR)(GRN)Start level:"
3040 AS=AS+STR$(SL)+"(GRV1)(F2)3399ARI8806(GRN)Final level:":STR$(EL)+"(F8)(BLUE)Wind speed: "
3050 IF (WI AND 16) THEN AS=AS+" Variable":GOTO 3080
3060 AS=AS+STR$(WI AND 7)*5)+" MPH ".IF (WI AND 7)=0 THEN 3080
3070 B$=STR$(INT(WI/32)+1):B$="0"+RIGHT$(B$,1):AS=AS+(F4)+B$
3080 AS=AS+"(BLK)(F8)(F8)":GOSUB 2830:POKE 253,SL:POKE 254,EL:POKE 823,0:SB=18:GOSUB 5230
3090 AS="(F8)(LBLU) L: Select Start/Stop Level(F8) M: New firer(F8) W: Set Wind Speed(F8)"
3100 B$="skill test".IF CL<0 THEN B$="level"+STR$(CL)
3110 AS=AS+" G: Go to "+B$+(F8)(F8)
3120 IF EZ THEN AS=AS+(GRN)(Level 1 targets are at 250 meters)(F8)
3130 IF NU THEN AS=AS+(GRN)(Pretest diagnostic scores are numeric)(F8)
3135 IF CS THEN AS=AS+(GRN)(Call your shot on levels 1-2)
3140 AS=AS+(F2)0023(RED)Type a number or letter & press RETURN(LBLU)(F8)(F3)00":GOSUB 2830
3150 AS="":GOSUB 5140:Z=INT(VAL(AS))
3160 IF (Z>=SL) AND (Z<=EL) THEN CL=Z:MOS="m":BC=0:RETURN
3170 IF AS="nu" THEN NU=NOT(NU):GOTO 3030
3180 IF AS="ez" THEN EZ=NOT(EZ):GOTO 3030
3185 IF AS="cs" THEN CS=NOT(CS):GOTO 3030
3190 IF AS="n" THEN CL=0:RETURN
3200 IF AS="g" THEN RETURN
3210 IF AS<>"1" THEN 3300
3220 MOS="m":AS="(F2)1423(RED)& press RETURN (F2)0024(BLUE)Start level (1-10)"
3230 GOSUB 5140:Z$=AS:SL=INT(VAL(AS)):IF (SL<1) OR (SL>10) THEN 3220
3240 IF (CL<SL) AND (CL<>0) THEN CL=SL
3250 IF SL=10 THEN EL=10:GOTO 3030
3260 AS="(F2)0024(LBLU)Final level ("&Z$+"&-10)":GOSUB 5140:EL=INT(VAL(AS))
3270 IF (EL<SL) OR (EL>10) THEN 3260
3280 IF CL>EL THEN CL=EL
3290 GOTO 3030
3300 IF AS<>"w" THEN 3420
3310 AS="(F3)09(CLR)Wind Effects:(F8)(F8)Type a number (1-3) for wind speed:(F8)(F8)"
3320 AS=AS+" 1: 0 MPH(F8)(F8) 2: 10 MPH(F8)(F8) 3: 20 MPH(F8)(F8)(F3)00":GOSUB 2830
3330 AS="":GOSUB 5140:WI=VAL(AS):IF (WI<1) OR (WI>3) THEN 3330
3340 WI=(WI-1)*2:IF WI=6 THEN WI=16:GOTO 3030
3350 IF WI=0 THEN 3030
3360 AS="(F3)09(CLR)Wind Effects:(F8)(F8)Type a number (1-8) for wind direction:(F8)(F8)"
3370 AS=AS+" 1: (F4)01 (No value)(F8)(F8) 2: (F4)02 (Half value)(F8)(F8) 3: (F4)03 (Full value)(F8)(F8)"
3380 AS=AS+" 4: (F4)04 (Half value)(F8)(F8) 5: (F4)05 (No value)(F8)(F8) 6: (F4)06 (Half value)(F8)(F8)"
3390 AS=AS+" 7: (F4)07 (Full value)(F8)(F8) 8: (F4)08 (Half value)(F8)(F8)(F3)00":GOSUB 2830
3400 AS="":GOSUB 5140:IF (VAL(AS)<1) OR (VAL(AS)>8) THEN 3400
3410 WI=WI+((VAL(AS)-1)*32):GOTO 3030
3420 IF AS="ca" THEN Z=1:GOTO 120
3430 IF AS="pf" THEN Z=2:GOTO 120
3440 IF AS="zs" THEN Z=3:GOTO 120
3450 IF AS="sp" THEN Z=4:GOTO 120
3460 GOTO 3150
3470 REM SETUP FOR REPLAY: CALL ONCE BEFORE ANY TARGETS PRESENTED
3480 POKE 2041,43:POKE 2042,43:POKE V+23,6:POKE V+29,6
3490 POKE V+40,1:POKE V+41,0:RETURN
3500 N=FNW(907):N=N+(N>128)*(N-128):SYS 3448:GOSUB 2600
3510 J=0:GOSUB 2670:AS="(F3)05(CLR)(F5)00(F1)(WHT)steady pos "+CR$
3520 J=1:GOSUB 2670:AS=AS+(F8)(WHT)trigger sq "+CR$:J=2:GOSUB 2670
3530 AS=AS+(F2)0019(WHT)follow thr "+CR$:J=3:GOSUB 2670
3540 AS=AS+(F8)(WHT)shot loc "+CR$+(HOME)":GOSUB 2810
3550 Z=TN:N=FNW(930):N=N+(N>32767)*65536:IF (CL=1) AND (EZ) THEN Z=5
3560 POKE 839,X+DA$(Z,2):POKE 840,0:POKE 841,Y+DA$(Z,3)
3570 POKE V+4,231-W:POKE V+5,127-TJ
3580 X1=ABS(244+(FNW(847)-(X+DA$(Z,2)))):Y1=ABS(143+(PEEK(849)-(Y+DA$(Z,3))))
3590 X2=PEEK(V+16) AND 254:IF FNH(X1)<>0 THEN X2=X2 OR 1
3600 GOSUB 2830:POKE V,FNL(X1):POKE V+1,FNL(Y1):POKE V+16,X2
3610 WS=128:POKE V+14,254-DA$(Z,2):POKE V+15,152-DA$(Z,3)
3620 IF (TN=1) AND ((EZ=0) OR (CL<>1)) THEN WS=192:POKE V+12,255:POKE V+13,120
3630 POKE 823,7:POKE 824,11:POKE 253,221:SYS CO:POKE 845,1:F=-1:SYS SV
3640 POKE V+21,WS OR 6:AS="(BLK)(F2)0212(F1)(RVGN)replay(RVCF)(F3)00":GOSUB 2830:N=FNW(905)
3645 N=N+(N>255)*(N-255):POKE 821,N:N=N-60:POKE 833,-N*(N>0):POKE 884,1
3650 IF (PEEK(884) AND 1)=0 THEN 3680
3660 IF (PEEK(56321)=247) AND (F=0) THEN POKE 884,0:Z=0:GOTO 3750
3670 GOTO 3650
3680 SYS BANG:F=0:POKE V+21,WS OR 7
3690 AS="(RT)(F2)0212pull trigger(F8)(C/RT)(C/RT)to continue ":GOSUB 2830:POKE 198,0:F=1:Z=1
3700 IF PEEK(56321)=247 THEN Z=0:GOTO 3750
3710 IF PEEK(56321)=127 THEN Z=128:GOTO 3750
3720 Z=Z+1:IF Z<100 THEN 3700
3730 F=F+1:IF F=2 THEN POKE V+21,WS OR 1:Z=0:GOTO 3700
3740 F=0:GOTO 3640
3750 GOSUB 2810:POKE V+21,0:RETURN
3760 A=0:BC=0:N=PEEK(838):IF N<2 THEN RETURN
3770 FOR J=0 TO 3:SD%(25,J)=0:NEXT J
3780 FOR S=0 TO N-1:FOR J=0 TO 3:SD%(25,J)=SD%(25,J)+SD%(S,J):NEXT J,S
3790 FOR J=1 TO 5:H%(J)=0:NEXT J
3800 FOR J=0 TO 3:SD%(25,J)=INT((SD%(25,J)/N)+.5):NEXT J:S=25:J=0:GOSUB 2670
3810 AS="(F3)05(F6)00(F5)00(F7)00(CLR)(LBLU)(F2)0601(F1)final: level"+STR$(CL)+"(F8)(F8)(WHT)steady pos "+CR$
3820 H$(Z)=H$(Z)+1:J=1:GOSUB 2670:AS=AS+(F8)(WHT)trigger sq "+CR$:H$(Z)=H$(Z)+1
3830 J=2:GOSUB 2670:AS=AS+(F8)(WHT)follow thr "+CR$:H$(Z)=H$(Z)+1
3840 J=3:GOSUB 2670:AS=AS+(F8)(WHT)shot loc "+CR$+(F3)08(F1)(WHT)":H$(Z)=H$(Z)+1:POKE V+21,0

```

```

3650 GOSUB 2790:A=0:BC=0:IF N<>NT*6 THEN RETURN
3660 IF H4(1)<2 THEN 3670
3665 A=(CL>SL):BC=6-A:B4=(F2)11992 or more(F8)(F2)0999poor scores":GOTO 3881
3670 IF (H4(1)=0) AND (H4(2)=0) THEN A=1:RETURN
3680 BC=6-B4:"(F2)1199a poor or(F8)(C/RT)below average score"
3681 AS=" (F3)09(CLR)(RED)(F1)(F8)(F8) You are being sent(F8)(C/RT) back to level"+STR$(CL+A)
3682 AS=AS+(F8) because you have(F8)" +B4+(F1)(WHT)":GOSUB 2790:RETURN
3690 FOR Z=B TO E+1:POKE 16325+Z,255:NEXT Z
3900 FOR Z=B TO E:Z1=INT(RND(1)*(E-B))+B
3910 IF PEEK(16325+Z1)-255 THEN POKE 16325+Z1,Z:GOTO 3940
3920 Z1=Z1+1:IF Z1>E THEN Z1=B
3930 GOTO 3910
3940 NEXT Z:RETURN
3950 GOSUB 2840:AS="L"+STR$(CL)+"|T= 0|R="+STR$(RP):GOSUB 5100
3960 TN=TN+1:IF TN=E+2 THEN Z=0:RETURN
3970 IF CL<8 THEN 4000
3980 AD=FNW(876):T=PEEK(AD):AD=AD+1
3990 FOR Z=1 TO T:Z1=INT(((PEEK(AD+5)*2)/3)+.5):POKE AD+5,Z1:AD=AD+14:NEXT Z
4000 AD=16512:IF (CL=6) OR (CL=8) THEN AD=10560
4010 IF (CL=7) OR (CL=9) THEN AD=20608
4030 Z=AD:IF PEEK(838)>=PEEK(899) THEN Z=Z+1
4040 SB=0:Z=Z+1R:POKE 53280,BC:GOSUB 5240:POKE V+21,0:IF Z=128 THEN RETURN
4050 IF Z=64 THEN SYS WH
4060 IF PEEK(878)<0 THEN 4060
4070 Z1=INT(RND(1)*3)+1*750:FOR Z=1 TO Z1:NEXT Z:GOTO 3960
4080 AS=" (F3)09(F6)00(CLR)(F5)13(F7)00(BLK)":GOSUB 2830
4090 POKE 251,FNL(Z):POKE 252,FNH(Z):Z=TN:IF (CL=1) AND (EZ) THEN Z=5
4100 POKE 880,Z:POKE 881,N:SYS GP:IF PEEK(824)=0 THEN RETURN
4110 AS=" (F2)0402Here is your"+STR$(PEEK(824))+ " round shot group"
4120 IF PEEK(823)>0 THEN AS=AS+"(F2)1003"+STR$(PEEK(823))+ " shot(s) missing"
4130 WS=128:AS=AS+"(F2)1404"+STR$(Z*50)+ " meters":POKE V+14,172-DA$(Z,2)
4140 POKE V+15,150-DA$(Z,3):POKE 2047,Z+32:POKE V+45,12:POKE V+46,12:Z1=0
4150 IF Z<3 THEN POKE2047,37+Z*2:Z1=192
4160 IF Z=1 THEN POKE V+12,173:POKE V+13,118:POKE 2046,40:WS=192
4170 POKE V+23,Z1:POKE V+29,Z1:POKE V+27,255:POKE V+16,0:POKE V+21,WS
4180 GOSUB 2790:POKE 53265,43:POKE V+27,0:POKE V+21,0:RETURN
4190 IF N=0 THEN RETURN
4200 Z1=0:Z2=PS*20:Z3=PEEK(838)-1:Z5=0:POKE 785,FNL(LC):POKE 786,FNH(LC)
4210 FOR Z=Z2 TO Z3:Z4=USR(Z):IF Z4<40 THEN Z5=Z4+Z5:Z1=Z1+1
4220 NEXT Z:Z4=0:IF Z1>0 THEN Z4=FN2(100-(Z5/Z1)*C)
4230 AS=AS+"(F2)1303(GRN)Hits(F2)2199(RED)Misses(YELO)(F2)2999No Fires(F8)(F8)":GOSUB 2830:Z1=0:Z2=0:Z3=0
4240 FOR I=1 TO 6:AD=I+PS*160:POKE 251,FNL(AD):POKE 252,FNH(AD)
4250 POKE 881,N:POKE 880,128+I
4260 SYS GP:AS=" (LBU)(F2)0599"+STR$(I*50)+ " m":Z=PS*3:DA$(I,5+Z)=PEEK(910)
4270 DA$(I,6+Z)=PEEK(911):DA$(I,7+Z)=DA$(I,PS)=PEEK(824)
4280 IF DA$(I,7+Z)<0 THEN DA$(I,7+Z)=0
4290 Z1=Z1+PEEK(910):Z2=Z2+PEEK(911):Z3=Z3+DA$(I,7+Z)
4300 AS=AS+"(GRN)(F2)1399"+STR$(PEEK(910))+ "(RED)(F2)2299"+STR$(PEEK(911))+ "(YELO)(F2)3299"
4310 AS=AS+STR$(DA$(I,7+Z))+ "(F8)(F8)":GOSUB 2830:NEXT I
4320 AS=" (F2)0699(LBU)TOTAL(F2)1399(GRN)" +STR$(Z1)+ "(F2)2299(RED)" +STR$(Z2)+ "(F2)3299(YELO)" +STR$(Z3)+ "(F8)(F8)"
4330 AS=AS+"(LBU)(F2)0699penalties:" +STR$(PEEK(912))+ "(F8)":IF PEEK(838)<=PS*20 THEN 4350
4340 Z5=9:GOSUB2880:AS=AS+"(LBU)(F2)0699your accuracy was " +RIGHT$(CR$,LEN(CR$)-5)+ "(F8)"
4350 BS=" (F2)1599(GRN)QUALIFIED(WHT)":IF Z1<15 THEN BS=" (F2)1499(RED)UNQUALIFIED(WHT)"
4360 AS=AS+BS:GOSUB 2790:RETURN
4370 AD=FNW(876):TN=PEEK(AD+3):Z1=DA$(TN,6)
4380 X=((INT(RND(1)*65)+2)+71:POKE AD+1,X:Y=PEEK(AD+2):TJ=PEEK(AD+11)
4390 TJ=TJ+(TJ>127)*256:IF TN=1 THEN POKE AD+15,X+48
4400 S=((TN-1)*NT)+Z1:POKE 838,S:AD=I+S*8:POKE AD+7,I
4420 POKE 900,255:POKE AD,255:GOSUB3480
4430 AS="L"+STR$(CL)+"|T="+STR$(I)+"|R="+STR$(RP):GOSUB 5100:POKE 12+7+S*8,RP
4440 SB=0:Z=1R:GOSUB 5240:POKE 878,0
4450 IF Z<128 THEN DA$(TN,6)=DA$(TN,6)+1
4460 IF Z>63 THEN RETURN
4470 FOR Z=1 TO 5:H4(Z)=0:NEXT Z:N=FNW(907):N=N+(N>128)*(N-128):GOSUB 2600
4480 J=0:GOSUB 2670:AS=" (F3)05(CLR)(F5)00(F1)(WHT)steady pos "+CR$:H4(Z)=H4(Z)+1
4490 J=1:GOSUB 2670:AS=AS+"(F8)(WHT)trigger sq "+CR$:H4(Z)=H4(Z)+1
4500 J=2:GOSUB 2670:AS=AS+"(F2)0019(WHT)follow thr "+CR$:H4(Z)=H4(Z)+1
4510 J=3:GOSUB 2670:AS=AS+"(F8)(WHT)shot loc "+CR$+"(HOME)":H4(Z)=H4(Z)+1
4520 GOSUB 2810:IF (H4(1)=0) AND (Z>2) THEN 4550
4530 GOSUB 3550:IF Z=128 THEN RETURN
4540 IF I<>NT*6 THEN GOSUB 2840
4550 IF PEEK(900)<128 THEN DA$(TN,5)=DA$(TN,5)+1
4560 RETURN
4570 FOR J=0 TO 3:SD$(25,J)=INT((SD$(25,J)/3)+.5):NEXT J
4580 A=S:B=Z:S=25:J=0:GOSUB 2670:AS=" (F3)05(F6)00(F5)00(F7)00(CLR)(WHT)(F1)steady pos "+CR$
4590 J=1:GOSUB 2670:AS=AS+"(WHT)trigger sq "+CR$:J=2:GOSUB 2670
4600 AS=AS+"(WHT)follow thr "+CR$:J=3:GOSUB 2670:AS=AS+"(WHT)shot loc "+CR$:S=A:Z=B
4610 GOSUB 2830:POKE 251,FNL(Z):POKE 252,FNH(Z):POKE 880,1:POKE 881,3:SYS GP
4620 AS="":IFPEEK(823)>0 THEN AS=AS+"(BLK)(F2)1008"+STR$(PEEK(823))+ " shot(s) missing"
4630 POKE 823,8:POKE 824,15:POKE 253,13:SYS CO
4640 POKE V+14,161:POKE V+15,135:POKE V+16,0:POKE V+21,128:POKE V+27,128
4650 AS=AS+"(SWLC)(WHT)(F2)0723Pull trigger to continue">(F3)00":GOSUB 2830:BS=" "
4660 IF PEEK(56321)=247 THEN Z=0:GOTO 4700
4670 GET AS:IF AS=" " THEN 4660
4680 BS=RIGHT$(BS,1)+AS:IF BS="rz" THEN Z=128:GOTO 4700
4690 GOTO 4660
4700 POKE 53265,43:POKE V+27,0:POKE V+21,0:RETURN
4710 AS=AS+"(F2)1303(GRN)Hits(F2)2199(RED)Misses(YELO)(F2)2999No Fires(F8)(F8)":GOSUB 2830:HI=0:MI=0:NF=0
4720 FOR I=1 TO 6:POKE 251,FNL(I):POKE 252,FNH(I):POKE 881,PEEK(838)
4730 POKE 880,128+I:SYS GP:AS=" (LBU)(F2)0599"+STR$(I*50)+ " m"
4740 MI=MI+PEEK(910):MI=MI+PEEK(911):Z3=DA$(I,4)=PEEK(824):IF Z3<0 THEN Z3=0
4750 WF=WF+Z3:AS=AS+"(GRN)(F2)1399"+STR$(PEEK(910))+ "(RED)(F2)2299"+STR$(PEEK(911))
4760 AS=AS+"(YELO)(F2)3299"+STR$(Z3)+ "(F8)(F8)":GOSUB 2830:NEXT I
4770 AS=" (F2)0699(LBU)TOTAL(F2)1399(GRN)" +STR$(HI)+ "(F2)2299(RED)" +STR$(MI)+ "(F2)3299(YELO)" +STR$(NF)+ "(F8)(F8)"
4780 REM AS=AS+"(F2)0799penalties:" +STR$(PEEK(912)):GOSUB 2770:RETURN
4790 BS=" (F2)1599(GRN)QUALIFIED(WHT)":IF HI<(23+ABS(FS-1)*5) THEN BS=" (F2)1499(RED)UNQUALIFIED(WHT)"
4800 AS=AS+BS:GOSUB 2790:RETURN
4810 PRINT#1,"p"CHR$(104)CHR$(FNL(Z))CHR$(FNH(Z))CHR$(0):RETURN
4820 INPUT#1,ER,AS,AS,AS:IF ER<21 THEN ER=0
4830 RETURN
4840 Z=1:OPEN 8,8,8,"data":GOSUB 4820:IF ER=0 THEN 4860
4850 CLOSE 8:OPEN 8,8,8,"data,1,"+CHR$(170):RE=1:HS=0:GOTO 4880
4860 GOSUB 4810:GET#8,AS,BS:RE=ASC(AS+CHR$(0))+ASC(BS+CHR$(0))*256
4870 GET#8,AS,BS:HS=ASC(AS+CHR$(0))+ASC(BS+CHR$(0))*256
4880 RE=RE+1:HS=HS+1:GOSUB 4810:AS=CHR$(FNL(RE))+CHR$(FNH(RE))
4890 AS=AS+CHR$(FNL(HS))+CHR$(FNH(HS)):PRINT#8,AS:Z=RE:GOSUB 4810
4900 PRINT#8,108:ID8:CHR$(13):CHR$(FNL(RE)):CHR$(FNH(RE)):CLOSE 8
4910 RC=RE:GOSUB 4820:RETURN

```

```

4920 IF (RK=0) OR ((N=0) AND (RP=0)) THEN RETURN
4930 OPEN 1,8,15:POKE V+21,0:IF RE<300 THEN 4970
4940 AS="(F3)09(F6)00(F5)00(F7)00(CLR)(F1)(F8) This disk is full(F4)(F8)(F8) Please insert(F8)(F8) another and(F8)(F8)"
4950 AS=AS+" press RETURN(F3)00":GOSUB2830
4960 GET AS:IF AS<>CHR$(13) THEN 4960
4970 AS="(F3)09(CLR)(F5)00(F7)00(RED)(SWLC)(F1)(F2)0112--- Please Wait --- (F3)00":GOSUB 2830
4980 IF (RE>299) OR ((CL=0) AND (T=0)) THEN GOSUB 4840:IF RE>299 THEN 4940
4990 OPEN 8,8,8,"data":Z=RE+1:GOSUB 4810:POKE 823,FNL(Z):POKE 824,FNH(Z)
5000 Z--(T<>0)*128:IF CL>0 THEN Z=CL:IF (CL>4) AND (PS=1) THEN Z=Z+128
5010 POKE 880,Z:POKE 881,AC:POKE 831,ASC(MOS):Z=8192
5020 IF CL>4 THEN 5040
5030 FOR Z1=0 TO 23:FOR Z2=0 TO 3:POKE Z,SD$(Z1,Z2):Z=Z+1:NEXT Z2,Z1
5040 SYS SA:RE=FNW(823):Z=1:GOSUB 4810:AS=CHR$(FNL(RE))+CHR$(FNH(RE))
5050 AS=AS+CHR$(FNL(HS))+CHR$(FNH(HS)):PRINT#8,AS:Z=RC:GOSUB 4810
5060 PRINT#8,IO$:ID$:CHR$(13):CHR$(FNL(RE)):CHR$(FNH(RE)):CLOSE 8
5070 GOSUB 4820:CLOSE 1:MOS="a":RETURN
5080 AS="(F3)09(F6)00(F5)00(F7)00(CLR)(RED)(SWLC)(F1)(F2)1110Get Ready(F3)00":GOSUB 2830
5090 FOR Z=1 TO 3000:NEXT Z:BC=2:RETURN
5100 BS="":IF ((WI AND 7)*5)=0 THEN 5130
5110 BS=STR$(((WI AND 224)/32)+1)
5120 BS="(F2)3400M~"+STR$((WI AND 7)*5)+"(F4)0"+RIGHT$(BS,1)
5130 AS="(HOME)(BLK)(RVON)(SWLC)+"AS+BS+"(F6)0"+CHR$(BC+48):GOSUB 2830:RETURN
5140 AS=AS+"? (C/LF)(C/LF)(C/LF)(C/LF)":GOSUB2830:BS=""
5150 GET AS:IF AS="" THEN 5150
5160 IF (AS=CHR$(13)) OR (LEN(BS)>2) THEN AS="(C/UP)(F8)":GOSUB 2830:AS=BS:RETURN
5170 IF AS<>CHR$(20) THEN 5200
5180 IF BS<>"" THEN BS=LEFT$(BS,LEN(BS)-1):AS="(C/LF)(C/LF)(C/LF)/(C/LF)":GOSUB 2830
5190 GOTO 5150
5200 IF (AS<"0") OR (AS>"z") THEN 5150
5210 BS=BS+AS:AS=AS+" (C/LF)":GOSUB 2830:GOTO 5150
5220 FOR Z=12 TO 12+343 STEP 8:POKE Z,255:NEXT Z:RETURN
5230 POKE 49168,SB:SYS 49162:RETURN
5240 POKE 785,10:POKE 786,192:POKE 49168,SB:Z=USR(Z):RETURN
6000 REM THE FOLLOWING IS THE CRITERION FOR GOOD,AVERAGE,BELOW AVERAGE,POOR
6010 DATA 95,90,84,79:REM SP SUP
6020 DATA 96,92,87,83:REM TS SUP
6030 DATA 95,89,82,76:REM FT SUP
6040 DATA 97,93,87,82:REM SL SUP
6050 DATA 92,87,81,76:REM SP UNS
6060 DATA 93,86,78,71:REM TS UNS
6070 DATA 93,79,64,50:REM FT UNS
6080 DATA 96,91,84,78:REM SL UNS
6090 DATA 39,35,30,26:REM HITS
6100 DATA 97,95,92,90:REM ACCURACY
6110 DATA 3,2,47,32,3,4,5,23,36,9,4,6,11,12,9
6120 DATA 4,4,11,14,6,3,2,11,15,7,2,1,11,16,6

```



```

*-3400
;MLTEXT.3400 FOR BRM CARTRIDGE
JMP  ENABLE
JMP  DSABLE
JMP  ROTATE
JMP  SEEVAL
JMP  NOTTRG
JMP  BANG
JMP  WAIT
JMP  SCENE
JMP  LETTERS
JMP  LETML
JMP  STDEV
JMP  RADERR
JMP  SHTGRP
JMP  COLORS
JMP  WHISTL
JMP  SAVEIT
JMP  PORT
.OPT  NOL
PRGNUM -49161
;
; CONVENTIONS USED
;PROCEDURE XXXXX
;PURPOSE OF PROCEDURE
;NECESSARY ACTIONS BEFORE CALL
;HOW TO CALL
;WHAT USER CAN EXPECT AFTER CALL
;
.LIB  MACROS-VARS
.OPT  NOL
;820-1023 IS UNUSED IF NO CASSETTE
CHOICE -820
STOP -821
HOLD1 -823
HOLD2 -824
WRT -825
HOLDA -826
HOLDX -827
NUMRD -828
NUMR20 -829
HOLD -831
DELAY -832
CUR1 -833
OFFX -834
OFFY -836
SHOTS -838
H1IRQ -839
H2IRQ -840
H3IRQ -841
H4IRQ -842
H5IRQ -843
H6IRQ -844
H7IRQ -845
H8IRQ -846
XVAL -847 ;X BULLET STRIKE
YVAL -849 ;Y BULLET STRIKE
SORTAF -851 ;# RDGS TO SORT AFTER
STSIZE -852 ;# TO PUT IN SRTBUF
SRTBUF -853
CURSRT -863
HOLDY -864
LENSTR -865
TRAJ -866
IRQ -867
SSCOL -868
SDCOL -869
FLAGS -870
CODE1 -871
CODE2 -872
COLOR -873
OFFSCR -874
HAFSEC -875
TARORD -876
CRSDLA -878
CURTF -879
HOLD3 -880
HOLD4 -881
CURTAR -882
CUR2 -883
IRQ2 -884
COPY -885
CODE3 -886
CODE4 -887
TARPRE -888
NUMR60 -889
;2 BYTES FREE AT 891
HITSPPR -893
SUMX -894
NSIZE -896
TIMES -897
FSTAT -898
MAXSHT -899
LASTSH -900
HITS -910
MISSES -911
PENAL -912
FINFO -913
MAXVAL -928
WIND -929
WDRIFT -930
SHOTRK -932
CURNUM -933
IRO3 -935
BORCOL -936
LPCMPX -937
LPCMPY -938
;NEXT ONE AT 939

```

```

CENX -15872
CENY -15880
TARNUM -15888
SPECIL -15906
YDRIFT -15904
XDRIFT -15912
JIFFYS -15920
TIMEFL -15928
INSTK -15936
CDLSTK -15944
DLSTK -15952
;
ADD -8B86A
CHKIN -8FFC6
CHKOUT -8FFC9
CHRN -8FFCF
CLOSE -8FFC3
CLRCHN -8FFCC
CHROUT -8FFD2
DIVIDE -8BB12
FLOAT -8B391
GETIN -8FFE4
LOAD -8FFD5
MLTPLY -8BA2B
OPEN -8FFC0
SETLFS -8FFBA
SETNAM -8FFBD
SQRT -8BF71
SUBSTR -8B853
UNFLOT -8B1BF
V -8D000
SID -8D400
TEMP -16192
XLPB20 -40960 ;UNDERNEATH ROM
YLPB20 -41472 ;UNDERNEATH ROM
XTGB20 -41984 ;UNDERNEATH ROM
YTGB20 -42496 ;UNDERNEATH ROM
XLPB60 -43008 ;UNDERNEATH ROM
YLPB60 -43264 ;UNDERNEATH ROM
XLP60 -43520 ;UNDERNEATH ROM
YLP60 -43550 ;UNDERNEATH ROM
XTGA60 -43580 ;UNDERNEATH ROM
YTGA60 -43610 ;UNDERNEATH ROM
INFO -43640 ;UNDERNEATH ROM
INFO2 -43984 ;UNDERNEATH ROM
HLDBUF -44328 ;UNDERNEATH ROM
;NEXT AT 44840
.MAC  DINC :DOUBLE
INC 71 :PRECISION
BNE 72 :INCREMENT
INC 71+1
72 .MND
.MAC  ADDR :MOVE LOW
LDA 72 :BYTE OF 72
STA 71 :INTO 71 AND
LDA 72+1 :HIGH BYTE OF
STA 71+1 :72 INTO 71+1
.MND
.MAC  MOVE
LDA 72
STA 71
LDA 72+1
STA 71+1
.MND
.MAC  DISK :DISK
LDA 72 :OPERATIONS
TAX :LOAD"72",8
LDY 771 :73 IS END OF
JSR SETLFS :FILE NAME
LDA 773-72 :THUS LENGTH
LDX 72 :OF FILE NAME
LDY 72 :IF 73-72
JSR SETNAM
LDA 72
.MND
.MAC  PRINT
LDA 72
LDY 72+1
JSR $ABLE :PRINT
.MND
.MAC  PUTR
PHA
TYA
PHA
TXA
PHA
.MND
.MAC  GETR
FLA
TAX
FLA
TAY
FLA
.MND
.MAC  DADD
LDA 71
CLC
ADC 72
STA 71
LDA 71+1
ADC 72+1
STA 71+1
.MND
.MAC  DSUB
LDA 71
SEC
SBC 72
STA 71

```

```

LDA 71+1
SBC 72+1
STA 71+1
.MND
.MAC  PLOT
LDY 771
LDX 772
CLC
JSR $FFFF0
.MND
.MAC  DSPL
LDA 772-71
STA LENSTR
LDA 771
STA 771
LDA 771
STA 771
JSR LETML
.MND
.OPT  LIST
.END  MACROS-VARS
.OPT  NOL
.LIB  IRQSTUFF
;IRQSTUFF FOR BRM CARTRIDGE
;PROCEDURE ENABLE
;PREPARES IRQ TO TAKE READINGS
;B:NONE
;C:SYS ENABLE
;A:NONE
ENABLE SEI
LDA 72
STA 56334
LDA 53265
AND 127
STA 53265
LDA 7250
STA 53266
LDA 75
STA 53274
LDA 53273
STA 53273
ADDR 5314,START
LDA 72
STA CUR1 :20 RDGS SP
STA CUR2 :60 RDGS SP
STA IRQ
STA BORCOL
STA NUMRD :# READINGS B
STA SORTAF :# SORT AFTER
LDA 75
STA STSIZE
LDA 71
STA HAFSEC
STA H7IRQ
CLI
RTS
;
;PROCEDURE DSABLE
;RETURNS IRQ VECTOR TO NORMAL
;B:NONE
;C:SYS DSABLE
;A:NONE
DSABLE SEI
LDA 71
STA 56334
LDA 7240
STA 53274
LDA 53273
STA 53273
ADDR 5314,SEA31
CLI
RTS
;
;PROCEDURE START (IRQ)
;INTERRUPT CONTROLLER ROUTINE
;
;IRQ HAS THE FOLLOWING VALUES:
;128: TAKE READINGS BEFORE
;64: TAKE READINGS AFTER
;32: GET COLLISION DATA
;16: SOUND NEEDED
;8: WAITING FOR TRIGGER RELEASE
;4: SHOT HAS BEEN FIRED
;2: NEW TARGET DISABLE
;1: NO BULLETS LEFT
;
;IRQ2 HAS THE FOLLOWING VALUES:
;128: RETURN AFTER ONE SHOT FIRED
;64: RETURN WHEN NO TARGETS UP
;32: NO HIT/MISS DETECTION
;16: NO CROSS DISPLAYED
;8: CROSS FOR MISS ONLY
;4: NO DATA SAVE TO INFO2
;2: DISPLAY TARGET NUMBER
;1: REPLAY
;
;TARORD (TARGET ORDER) IS SET UP
;IN THE FOLLOWING MANNER:
;BYTE 0:# TARGETS THIS HALF SECOND
;1:STARTING X COORDINATE
;2:STARTING Y COORDINATE
;3:TARGET # (FOR ID)
;4:TARGET SPRITE POINTER
;5:BIT 7:SET TO EXPAND X
;6:SET TO EXPAND Y
;5:RIGHT X
;0-3:SPRITE COLOR
;6:TIME LIMIT*2 (SECONDS)

```

```

: 7:DELAY (FOR DLSTK,CDLSTK)          LDA   IRQ   ;DON'T TAKE
: 8:INCREMENT (FOR INSTK)             AND   #63   ; ANY MORE
: 9:TIME/FLIGHT (#PIXELS/BYTES)       STA   IRQ   ; READINGS IF
: 10:X DRIFT                          JMP   IRQ340 ; NO TARGETS
: 11:Y DRIFT                          CMP   #254
: 12:BIT 7:NOT A TARGET               BNE   IRQ110
: 6:REVERSE DIRECTION                 LDA   IRQ
: 5:TAR MORE THAN 1 SPR               ORA   #2
: 4:DON'T INC TARPRE                  STA   IRQ
: 2-0:0 TARGETS                      JMP   IRQ140
: 13:X CENTER OF MASS OFFSET/2        CMP   #253 ;WHISTLE?
: 14:Y CENTER OF MASS OFFSET          BNE   IRQ130
:                                     LDA   OFFSCR ;SET FLAG
:                                     ORA   #1
:                                     STA   OFFSCR
: INFO IS SAVED AS FOLLOWS:
: BYTE 0:TARGET # (FOR ID)           DINC  $FB
: 1:BULLET X/2                       JMP   IRQ090
: 2:BULLET Y                         CMP   #128 ;DELAY
: 3:TARGET X/2                       BCC   IRQ150
: 4:TARGET Y                         SEC
: 5:NUMR20 (LOW)                     SBC   #1
: 6:NUMR20 (HIGH)                    STA   ($FB),Y
:                                     CMT   #128
: START LDA #4                       BEQ   IRQ120
: BIT 53273                          LDA   #0
: BEQ CONTIN                         STA   H5IRQ ;TARGETS
: LDA 53273                          LDX   #7
: STA 53273                          LDA   #128
: JMP $FBC                           IRQ140 LDA #0
: CONTIN LDA 53265                    IRQ150 STA H5IRQ ;TARGETS
: AND #127                           LDA   #7
: STA 53265                          LDA   #128
: LDA #250                           STA   H3IRQ ;SPRITE BIT
: STA 53266                          LDA   H3IRQ
: LDA 53273                          EOR   #255 ;NOT SPRITE
: STA 53273                          STA   H4IRQ ; BIT
: LDA IRQ2                           LDA   V+21
: AND #1                             AND   H3IRQ
: BEQ IRQ010                         BEQ   IRQ160 ;SPRITE OFF
: JMP REPLAY                         LDA   JIFFYS,X
: IRQ010 LDX V+30 ;SPR/SPR           BMI   IRQ170 ;NO LIMIT
: LDY V+31 ;SPRITE/DATA             LEC   JIFFYS,X
: LDA IRQ                            BNE   IRQ170 ;MORE TIME
: AND #32 ;COLLISION                LDA   H3IRQ ;TIME LIMIT
: BEQ IRQ020                         ORA   OFFSCR ; HAS EXPIRED
: STX SSCOL                         STA   OFFSCR
: STY SDCOL                         LDA   #128
: LDA IRQ                            STA   JIFFYS,X
: AND #223 ; COLLISION              LDA   OFFSCR ;HAS TIME
: STA IRQ                            EOR   #255 ; EXPIRED
: IRQ020 LDA IRQ                     AND   V+21 ; ON ALL
: AND #16                           BNE   IRQ170 ; TARGETS?
: BEQ IRQ030                         LDA   #64
: ;PLAY ANY SOUNDS HERE             STA   FSTAT
: IRQ030 LDA IRQ                     JMP   IRQ230
: AND #8 ; TRIGGER                  LDA   H5IRQ
: BEQ IRQ040 ; RELEASE?             BEQ   IRQ170 ; DISPLAYING?
: LDA 56321 ;YES:HAS IT             DEC   H5IRQ
: CMP #247 ; BEEN                   LDA   H4IRQ ;CLEAR
: BEQ IRQ040 ; RELEASED              AND   V+23 ; EXPAND Y
: LDA IRQ                            STA   V+23
: AND #247 ; FLAG                   LDA   H4IRQ
: STA IRQ                            AND   V+29 ; EXPAND X
: IRQ040 LDA CRSDLA ;CROSS ON?       STA   V+29
: BEQ IRQ060                         LDA   H4IRQ ;CLEAR
: DEC CRSDLA                        AND   V+16 ; RIGHT X
: BNE IRQ060                         STA   V+16
: LDA HITSR ;TURN OFF               TXA
: EOR #255 ; CROSS AND              ASL   A
: AND V+21 ; ANY HIT                TAX
: STA V+21 ; TARGET LEFT            LDA   ($FB),Y ; X COORDINATE
: BIT IRQ2                          STA   V,X
: BVC IRQ050                        INY
: CMP #0                            LDA   ($FB),Y ; Y COORDINATE
: BNE IRQ050                        STA   V+1,X
: LDA IRQ                            INY
: AND #63                           TXA
: STA IRQ                            LSR
: JMP $EA31 ;NORMAL IRQ             TAX
: IRQ050 LDA #0                     LDA   ($FB),Y
: STA HITSR                          STA   TARNUM,X
: LDA IRQ                            INY
: AND #192 ; READINGS?              LDA   ($FB),Y ;SPRITE PTR
: BNE IRQ070                        STA   2040,X
: LDA #0                             INY
: STA CUR1                          LDA   ($FB),Y ;EXPAND X?
: STA CUR2                          BPL   IRQ190
: STA BORCOL                        LDA   V+29 ;YES
: JMP $EA31 ;NORMAL IRQ             ORA   H3IRQ
: IRQ070 LDA $FB                     STA   V+29
: PHA                               LDA   ($FB),Y ;EXPAND Y?
: PHA                               AND   #64
: DEC HAFSEC ;NEW TARGET?           BEQ   IRQ200
: BEQ IRQ080 ; OR TIME LM?          LDA   V+23 ;YES?
: JMP IRQ250 ;NOT TIME YET          ORA   H3IRQ
: IRQ080 STA HAFSEC ; HALF SECOND   STA   V+23
: MOVE $FB,TARORD                  LDA   ($FB),Y ;RIGHT X?
: IRQ090 LDY #255                    AND   #32
: LDA IRQ                            BEQ   IRQ210
: AND #2                             LDA   V+16
: BNE IRQ140 ; DISABLED?            STA   H3IRQ
: LDY #0                             STA   V+16
: LDA ($FB),Y ;# TARGETS            IRQ210 LDA ($FB),Y ;SPRITE COLOR
: CMP #255                          AND   #15
: BNE IRQ100                        STA   V+39,X
: LDA #32                           INY
: STA FSTAT                         LDA   ($FB),Y ;TIME LIMIT
: DINC TARORD                       STA   JIFFYS,X
:                                     INY
:                                     LDA   ($FB),Y ;DELAY FOR
:                                     STA   DLSTK,X ; MOVEMENT
:                                     STA   CDLSTK,X
:                                     INY
:                                     LDA   ($FB),Y ;INCREMENTFOR
:                                     STA   INSTK,X ; MOVEMENT
:                                     INY
:                                     LDA   ($FB),Y ;TIME OF
:                                     STA   TIMEFL,X ; FLIGHT
:                                     INY
:                                     LDA   ($FB),Y ;X DRIFT
:                                     STA   XDRIFF,X
:                                     INY
:                                     LDA   ($FB),Y
:                                     STA   YDRIFF,X
:                                     INY
:                                     LDA   ($FB),Y ;SPECIAL
:                                     STA   SPECIL,X
:                                     AND   #16 ;COUNT AS
:                                     BNE   IRQ220 ; TARPRE
:                                     INC   TARPRE
:                                     TXA
:                                     JSR   INCNUM
:                                     TAX
:                                     IRQ220 INY
:                                     LDA   ($FB),Y ;CEN X OFFSET
:                                     STA   CENX,X
:                                     INY
:                                     LDA   ($FB),Y ;CEN Y OFFSET
:                                     STA   CENY,X
:                                     INY
:                                     LDA   V+21 ;TURN ON
:                                     ORA   H3IRQ ; SPRITE
:                                     STA   V+21
:                                     IRQ230 LSR
:                                     H3IRQ
:                                     DEX
:                                     BEQ   IRQ240 ;NEXT SPRITE
:                                     BEQ   IRQ240 ;FINISHED?
:                                     JMP   IRQ160
:                                     IRQ240 TYA
:                                     CLC
:                                     ADC   $FB ; TAR NEXT
:                                     STA   TARORD ; TIME
:                                     LDA   $FC
:                                     ADC   #0
:                                     STA   TARORD+1
:                                     LDA   IRQ2 ;SHOW TARGET
:                                     AND   #2 ; NUMBER?
:                                     BEQ   IRQ250
:                                     JSR   SHONUM
:                                     IRQ250 LDA IRQ
:                                     AND   #5 ; READY TO
:                                     BEQ   IRQ270 ; PROCESS?
:                                     JMP   IRQ340
:                                     IRQ270 LDA IRQ
:                                     AND   #128
:                                     BNE   BEFORE
:                                     JMP   AFTER
:                                     JSR   ONSCRN
:                                     BEFORE ADDR $FB,XLPB20
:                                     LDA   CUR2
:                                     AND   #127
:                                     TAY
:                                     LDA   SHOTS
:                                     AND   #1
:                                     BEQ   IRQ280
:                                     TYA
:                                     ORA   #128
:                                     TAY
:                                     INC   $FC
:                                     IRQ280 LDA H1IRQ
:                                     STA   XLPB60,Y
:                                     LDA   H2IRQ
:                                     STA   YLPB60,Y
:                                     INY
:                                     STY   CUR2
:                                     DINC  NUMR60
:                                     DEC   H7IRQ
:                                     BNE   IRQ260
:                                     LDA   #3
:                                     STA   H7IRQ
:                                     LDY   CUR1
:                                     LDA   H1IRQ
:                                     STA   ($FB),Y
:                                     YNC   $FC
:                                     INC   $FC
:                                     LDA   H2IRQ
:                                     STA   ($FB),Y
:                                     INY
:                                     STY   CUR1
:                                     DINC  NUMR20
:                                     LDY   CURSRT
:                                     INC   CURSRT
:                                     CPY   #5
:                                     BCC   IRQ290
:                                     LDY   #0
:                                     STY   CURSRT
:                                     IRQ290 LDA H1IRQ
:                                     STA   SRTBUF,Y
:                                     TYA
:                                     CLC
:                                     AND   #5
:                                     ADC   $FC
:                                     TAY
:                                     LDA   H2IRQ
:                                     STA   SRTBUF,Y
:                                     LDA   IRQ ;HAS TRIGGER
:                                     AND   #12 ; BEEN
:                                     BNE   IRQ300 ; RELEASED?
:                                     LDA   56321 ;TRIGR FULL
:                                     CMP   #247

```

```

BNE IRQ300
BIT BORCOL ; LIGHTPEN
BPL SWFULL ; ON SCREEN?
LDA #4
STA 53280
IRQ300 JMP IRQ340
SWFULL JSR BANG
LDA #0 ; IF ANYONE
STA XVAL ; HAS THE
STA XVAL+1 ; REVELATION
STA YVAL ; THAT SORT-
STA YVAL+1 ; ING REALLY
LDA H1IRQ ; IS THE
BEQ IRQ320 ; ANSWER,
ASL A ; REMOVE
LDA #0 ; THESE LINES
BCC IRQ310 ; & REINSERT
INX ; THE CALL TO
IRQ310 CLC ; GETXY IN
ADC OFFX ; CTRMOV
STA XVAL ; ---
TXA ; ---
ADC OFFX+1 ; ---
STA XVAL+1 ; ---
LDA H2IRQ ; ---
CLC ; ---
ADC OFFY ; ---
STA YVAL ; ---
IRQ320 LDA IRQ
AND #127
ORA #76
LDA IRQ ; FORMERLY 3
STA SORTAF
LDA #10
STA NUMRD
JSR INFOFB
LDY #5
LDA NUMR20
STA ($FB),Y
STA LASTSH,Y
INY
LDA NUMR20+1
STA ($FB),Y
STA LASTSH,Y
LDA NUMR60
STA LASTSH+7
LDA NUMR60+1
STA LASTSH+8
LDA #0
STA CUR1
STA CUR2
STA NUMR20
STA NUMR20+1
STA NUMR60
STA NUMR60+1
IRQ340 PLA
STA $FC
PLA
STA $FB
JMP $EA31 ; NORMAL IRQ
AFTER LDY CUR2 ; STACK PTR
INC CUR2
LDA 53267 ; X LOCATION
STA H1IRQ
STA XLP60,Y
LDA 53268 ; Y LOCATION
STA H2IRQ
STA YLP60,Y
LDA SORTAF
BEQ IRQ360
LDY CURSRT
INC CURSRT
CPY #5
BCC IRQ350
LDY #0
STA CURSRT
IRQ350 LDA H1IRQ
STA SRTBUF,Y
TYA
CLC
ADC #5
TAY
LDA H2IRQ
STA SRTBUF,Y
DEC SORTAF
IRQ360 DEC NUMRD ; # READINGS
BNE IRQ380 ; TO TAKE
LDA IRQ
EOR #192
STA IRQ
LDA #0 ; ZERO STACK
STA CUR1 ; PTR IF DONE
STA CUR2
STA CURSRT
LDA #1
STA H7IRQ
BIT IRQ2
BNI IRQ370
BVC IRQ380
LDA V+21
AND #254
BNE IRQ380
IRQ370 LDA IRQ
AND #63
STA IRQ
IRQ380 JMP IRQ340
ONSCRM LDA 53267 ; X READINGS

```

```

STA H1IRQ
LDX 53268 ; Y READINGS
STX H2IRQ
CMP LPCMPX
BNE ONSC30
CPX LPCMPY
BNE ONSC30
BIT BORCOL
BNI ONSC20
INC BORCOL
LDA BORCOL
CMP #30
BCS ONSC10
RTS
ONSC10 LDA 53280
ORA #128
STA BORCOL
ONSC20 LDA #0
STA H1IRQ
STA H2IRQ
ONSC30 RTS
STA LPCMPX
STX LPCMPY
BIT BORCOL
BPL ONSC40
LDA BORCOL
STA 53280
ONSC40 LDA #0
STA BORCOL
RTS
INFOFB LDA #0
STA $FC
LDA SHOTS
ASL A
ASL A
ASL A
ROL $FC
CLC
ADC <<INFO
STA $FB
LDA $FC
ADC >>INFO
STA $FC
RTS
INCNUM LDX CURNUM+1
INX
CPX #10
BCC INC020
LDX CURNUM
INX
CPX #10
BCC INC010
LDX #0
INC010 STX CURNUM
LDX #0
INC020 STX CURNUM+1
RTS
SHONUM LDY #0
LDX #80 ; LEAD SPACE
LDA CURNUM
BEQ SHN010
ASL A
ASL A
ASL A
TAX
SHN010 LDA NUMDAT,X
STA #256,Y
INX
INY
CPY #8
BCC SHN010
LDA CURNUM+1
ASL A
ASL A
ASL A
TAX
SHN020 LDA NUMDAT,X
STA #256,Y
INX
INY
CPY #16
BCC SHN020
RTS
NUMDAT .BYTE 195,153,145,137,153,153,
195,255,231,231,199,231,231,129,
.BYTE 255,195,153,249,243,207,
159,129,255,195,153,249,227,249,153,
.BYTE 195,255,249,241,225,153,
120,249,249,255,129,159,131,249,249,
.BYTE 153,195,255,195,153,159,
131,153,153,195,255,129,153,243,231,
.BYTE 231,231,231,255,195,153,
153,195,153,153,195,255,195,153,153,
.BYTE 193,249,153,195,255,255,
255,255,255,255,255,255
END INQSTUFF
LIB REPLAY
;REPLAY FOR 10-LEVEL BRM PROGRAM
REPLAY DEC H7IRQ
BEQ RPL010
JMP RPL090
RPL010 LDA #3
STA H7IRQ
LDY CUR1
INY
CPY STOP ; LAST RDG?
BNE RPL020
LDA YVAL

```

```

BEQ RPL050
SEC
SBC TRAJ
STA H6IRQ
LDA XVAL
BEQ RPL050
SEC
SBC WDRIFF
TAX
LDA XVAL+1
SBC WDRIFF+1
STA H5IRQ
TXA
LDX H5IRQ
DEY
JMP RPL040
RPL020 DEY
LDA 12928,Y ; BULY
BEQ RPL050
CLC
ADC OFFY
STA H6IRQ
LDX #0
LDA 12672,Y ; BULK
BEQ RPL050
ASL A
BCC RPL030
LDX #1
RPL030 CLC
ADC OFFX
STA H4IRQ
TXA
ADC OFFX+1
STA H5IRQ
LDA H4IRQ
RPL040 SEC
SBC H1IRQ ; TARK L
STA H4IRQ ; BULK-TARK
LDA H5IRQ
SBC H2IRQ ; TARK H
STA H5IRQ
LDA H4IRQ
CLC
ADC #231 ; 254-23 SPOST
STA V+2 ; OFFSET
LDA H5IRQ
ADC #0
BNE RPL060
LDA V+16
AND #253
STA V+16
JMP RPL070
RPL050 LDA #0
STA V+2
STA V+3
LDA V+16
AND #253
STA V+16
JMP RPL080
RPL060 LDA V+16
ORA #2
STA V+16
RPL070 LDA H6IRQ ; BULY
SEC
SBC H3IRQ ; BULY-TARY
CLC
ADC #127 ; 152-25 SPOST
STA V+3 ; OFFSET
RPL080 INY
STY CUR1
CPY STOP
BNE RPL090
LDA #0
STA IRQ2
RPL090 JMP $EA31 ; NORMAL IRQ
END REPLAY
;
;PROCEDURE ROTATE
;TAKES READINGS BEFORE TRIGGER
; PULL AND MOVES THEM SO THAT
; THE OLDEST READINGS ARE FIRST.
;C:SYS ROTATE
;A:RDGS IN BUFFERS ARE ADJUSTED.
ROTATE LDA 1
PHA
LDA #54
STA 1
LDA LASTSH+6
BEQ ROT030
LDY LASTSH+5
BEQ ROT030
ADDR $FB,XLPB20
ADDR $FD,YLPB20
LDX #0
LDA SHOTS
AND #1
BEQ ROT010
INC $FC
INC $FE
ROT010 LDA ($FB),Y
STA HLDBUF,X
LDA ($FD),Y
STA HLDBUF+256,X
INY
INX
BNE ROT010
LDY #0
ROT020 LDA HLDBUF,Y

```

```

STA ($FB),Y
LDA HLDBUF+256,Y
STA ($FD),Y
INY
BNE ROT020
LDA LASTSH+7
ASL A
BEQ ROT070
LDA LASTSH+8
BNE ROT040
BCC ROT070
ROT040 LDA <<XLPB60
STA $FB
STA $FD
LDA <>XLPB60
STA $FC
STA $FE
INC $FE
LDA LASTSH+7
AND #127
TAY
LDA SHOTS
AND #1
BEQ ROT050
LDA $FB
CLC
ADC #128
STA $FB
STA $FD
LDA $FC
ADC #0
STA $FC
STA $FE
INC $FE
ROT050 LDA ($FB),Y
STA HLDBUF,X
LDA ($FD),Y
STA HLDBUF+128,X
INY
TAY
AND #127
TAY
INX
BPL ROT050
LDY #0
ROT060 LDA HLDBUF,Y
STA ($FB),Y
LDA HLDBUF+128,Y
STA ($FD),Y
INY
BPL ROT060
ROT070 PLA
STA 1
RTS
NOTTRG LDA 56321 ;REPEAT
CMP #255 ;UNTIL
BNE NOTTRG ;TRIGGER IS
RTS ;RELEASED
BANG LDA #15
STA 54296
LDA #10
STA 54277
LDA #30
STA 54273
LDA #128
STA 54276
LDA #129
STA 54276
RTS
WHISTL LDY #23
LDA #0
WHISTL STA SID,Y
DEY
BPL WHISTL10
LDA #18
STA DELAY
WHISTL20 LDA #180
STA SID+1
LDA #46
STA SID
LDA #15
STA SID+5
STA SID+24
LDY #7
WHISTL30 LDX #255
WHISTL40 DEX
BNE WHISTL40
DEY
BNE WHISTL30
LDA #170
STA SID+1
LDA #6
STA SID
LDA #21
STA SID+4
LDY #30
WHISTL50 LDX #255
WHISTL60 DEX
BNE WHISTL60
DEY
BNE WHISTL50
DEC DELAY
BNE WHISTL20
LDY #23
LDA #0
WHISTL70 STA SID,Y
DEY
BPL WHISTL70

```

```

RTS
;PROCEDURE WAIT
;CAUSES A DELAY
;B:LDY WITH AN APPROPRIATE DELAY
;C:JSR WAIT
;A:NONE
WAIT LDX #455
WAIT1 DEX
BNE WAIT1
DEY
BNE WAIT1
RTS
SCENE LDA $FB ;CHIP #/BANK
STA $DFFF
LDY #0
LDA ($FD),Y
STA $FB ;CRUNCH CODE
DINC $FD
LDA #43
STA 53265
LDA #29
STA 53272
ADDR $A3,1024
SCL010 LDA ($FD),Y
STA ($A3),Y
DINC $FD
DINC $A3
LDA $A3
CMP #<2024
BNE SCL010
LDA $A4
CMP #>2024
BNE SCL010
ADDR $A3,192
SCL020 LDA $FB ;CRUNCH CODE
STA ($A3),Y
DINC $A3
LDA $A3
CMP #<16192
BNE SCL020
LDA $A4
CMP #>16192
BNE SCL020
ADDR $A3,8192
SCL030 LDA ($FD),Y
STA ($A3),Y
DINC $FD
BNE SCL040 ;CRUNCH CODE
DINC $FD
LDA ($FD),Y
STA $A3
DINC $FD
LDA ($FD),Y
CLC
ADC #>8192
STA $A4
JMP SCL050
SCL040 STA ($A3),Y
DINC $A3
SCL050 DINC $FD
LDA $A3
CMP #<16192
BNE SCL030
LDA $A4
CMP #>16192
BNE SCL030
LDA #59
STA 53265
LDA #32 ;RAM
STA $DFFF
RTS
;PROCEDURE SEERVAL
;MOVE VALUES FROM UNDER ROM
; SINCE SHOTS WILL HAVE ALREADY
; BEEN INCREMENTED, THIS ROUTINE
; MOVES THE HIGH BUFFER IF SHOTS
; IS EVEN. IT MOVES THE LOW
; BUFFER IF SHOTS IS ODD
SEERVAL LDA 1
PHA
LDA #54 ;SELECT RAM
STA 1 ;AT $A000
ADDR $FB,XLPB20
LDY #0
LDA SHOTS
AND #1
BNE SEER010
INC $FC
SEER010 LDA ($FB),Y
STA 12672,Y
INY
BNE SEER010
INC $FC
SEER020 LDA ($FB),Y
STA 12928,Y
INY
BNE SEER020
PLA
STA 1
RTS
;PROCEDURE COLORS
;CHANGES COLOR OF PART OF BITMAP
;POKE HOLD1 WITH START LINE
; POKE HOLD2 WITH # OF LINES
; POKE $FD WITH THE COLOR
COLORS ADDR $FB,1024
LDX HOLD1 ;START LINE

```

```

BEQ COL020
COL010 JSR ADD40
DEX
BNE COL010
COL020 LDX HOLD2 ;HOW MANY
COL030 LDY #39
COL040 LDA $FD ;COLOR
STA ($FB),Y
DEY
BPL COL040
JSR ADD40
DEX
BNE COL030
RTS
ADD40 LDA $FB ;ADD 40 TO
CLC ; $FB FOR
ADC #40 ; NEXT LINE
STA $FB
LDA $FC
ADC #0
STA $FC
RTS
.LIB MATHFUNCTIONS
;FUNCTION STDEV
;PUT INTO FLOATING POINT REGISTER:
; START BYTE IN STACK * 256 +
; END BYTE IN STACK
STDEV JSR $B18F
STD110 LDA 100
STA NSIZE
LDA 101
STA TIMES
SEC
SBC 100
CLC
ADC #1
CMP #2
STD120 STD140
JMP STD120
PHA
LDA #0
TAY
JSR $B391 ;FLOAT
JSR $B8C7 ;SAVE
LDA #0
STA SUMX
STD130 LDA STA SUMX+1
PHA
LDA #54
STA 1
LDY TIMES
LDA ($FD),Y
STA HOLD
CLC
ADC SUMX
STA SUMX
LDA SUMX+1
ADC #0
STA SUMX+1
PLA
STA 1
LDY HOLD
LDA #0
JSR $B391 ;FLOAT
JSR $B8C7 ;PUT IN FA2
LDY HOLD
LDA #0
JSR $B391 ;FLOAT
JSR $BA2B ;MULTIPLY
LDA #55C
LDY #0
JSR $BA8C ;LOAD FA2
JSR $B86A ;ADD
JSR $B8C7 ;SAVE FA1
DEC TIMES
LDY TIMES
CPY NSIZE
BCS STD130
PLA
STA NSIZE
LDY SUMX
LDA SUMX+1
JSR $B391 ;FLOAT
JSR $B8C7 ;PUT IN FA2
LDY SUMX
LDA SUMX+1
JSR $B391 ;FLOAT
JSR $BA2B ;MULTIPLY
JSR $B8C7 ;PUT IN FA2
LDA #0
LDY NSIZE
JSR $B391 ;FLOAT
JSR $BB12 ;DIVIDE
LDA #55C
LDY #0
JSR $BA8C ;LOAD FA2
JSR $B853 ;SUBTRACT
JSR $B8C7 ;PUT IN FA2
LDA #0
LDY NSIZE
DEY
JSR $B391 ;FLOAT
JSR $BB12 ;DIVIDE
LDA 102 ;SIGN FOR FA1
AND #127
STA 102 ;ABS
JSR $BF71 ;SQR

```



ASL A ;COLUMN*2	LDA 53272 ;SET LOWER	SBC #0
ASL A ;COLUMN*4	ORA #2 ;CASE	STA 210
ASL A ;COLUMN*8	STA 53272	DEC \$FF
BCC LET070	LDA FLAGS	BEQ BIG1
INC \$FE	ORA #4	JMP LET600
CLC	STA FLAGS	LET370 CMP #157 ;LEFT ARROW
LET070 ADC \$FD	LET240 LDA 1 ;VIC CHIP	BNE LET390
STA \$FD ;L*320+C*8	AND #251 ;OUT AGAIN	LDA FLAGS
LDA \$FE	STA 1	AND #1
ADC #32 ;+8192	JMP LET600	STA \$FF
STA \$FE	CMP #18 ;REVERSE	LET211
LET080 LDA (\$A3),Y	BNE LET260 ;ON	BNE LET380
STY HOLDY	LDA FLAGS	LDA 214
CMP #142 ;SET 1	ORA #2	BEQ SKIP
BNE LET090	STA FLAGS	DEC 214
LDA FLAGS	JMP LET600	LDA #40
AND #251	CMP LET262 ;REVERSE	STA 211
STA FLAGS	BNE LET262 ;OFF	LDA 209
JMP LET600	LDA FLAGS	SEC
LET090 CMP #14 ;SET 2	AND #253	SBC #40
BNE LET100	STA FLAGS	STA 209
LDA FLAGS	JMP LET600	LDA 210
ORA #4	LET262 CMP #138 ;F4-ARROWS	SBC #0
STA FLAGS	BNE LET270	STA 210
JMP LET600	JSR BYTE2	LET380 DEC 211
LET100 CMP #133 ;F1-ENLARGE	BCC LET264	DEC \$FF
BNE LET110 ;OR	LET263 JMP LET610	BEQ BIG2
LDA FLAGS ;NORMAL	SEC	JMP LET600
EOR #1	SBC #1	LET390 CMP #13
STA FLAGS	CMP #8	BNE LET410
JMP LET600	BCS LET263	LDA #40
LET110 CMP #137 ;F2-CURSOR	ASL A	STA 211
BNE LET160	ASL A	JSR TLINE
JSR BYTE2	ASL A	JMP LET600
BCC LET130	CLC	LET410 CMP #136 ;F7-CHAR COL
LET120 JMP LET610	ADC #<ARROWS	BNE LET430
LET130 CMP #40	STA \$FB	JSR BYTE2
BCS LET140	LDA #>ARROWS	BCC LET420
STA 211 ;X	ADC #0	JMP LET610
JSR BYTE2	STA \$FC	LET420 LDA #15
BCS LET120	JMP LET520	STA CODE1
CMP #25	CMP #135 ;F5-COLOR	LDA HOLDA
BCS LET150	BNE LET290	ASL A
STA 214	JSR BYTE2	ASL A
LDY #4	BCC LET280	ASL A
STY 210	JMP LET610	ASL A
ASL A	LET280 LDA #240	STA HOLDA
ASL A	STA CODE1	JSR ADJSCR
ASL A	JSR ADJSCR	JMP LET600
STA HOLDA	JMP LET600	LET430 CMP #140 ;F8-RETURN
STA 209	LET290 CMP #139 ;F6-BORDER	BEQ LET400
LDA HOLDA	BNE LET310 ;COLOR	CMP #19 ;HOME
CLC	JSR BYTE2	BNE LET440
ADC 209	BCC LET300	JMP LET330
STA 209	JMP LET610	LET440 LDX #0
LDA 210	LET300 TAX	LET450 LDA SPCIAL,X
ADC #0	LDA 1	BEQ LET470
STA 210	ORA #4 ;SWITCH IN	CMP (\$A3),Y
DEY	STA 1 ;VIC CHIP FOR	BEQ LET460
BNE MUL5	STX 53280	INX
LET150 JMP LET600	LDA 1 ;BORDER	INX
LET160 CMP #134 ;F3-SPC INSTR	AND #251 ;SWITCH OUT	JMP LET450
BEQ LET170	STA 1 ;VIC CHIP	LDA SPCIAL,X
JMP LET250	STA 1 ;AGAIN	STA 646
JSR BYTE2	JMP LET600	JMP LET600
BCC LET180	CMP #147 ;CLEAR SCREEN	LDA (\$A3),Y
JMP LET610	BNE LET340	CMP #96
LET180 LDA 1 ;VIC CHIP	LDA #<8192	LET480 BCS LET480
ORA #4 ;BACK IN FOR	STA \$FD	AND #191 ;X<96
STA 1 ;A SECOND	LDY #0	JMP LET500
LDA HOLDA	LDA #0	LET480 CMP #161
AND #1	STA (\$FD),Y	BCS LET490
BEQ LET190	DINC \$FD	AND #223 ;96X<161
LDA 53265 ;BLANK SCREEN	LDA \$FD	JMP LET500
AND #239	CMP #<16192	LET490 AND #127 ;161X<256
STA 53265 ;SCREEN	BNE LET320	ORA #64
JMP LET200	LDA \$FE	LET500 STA \$FB
LDA 53265 ;UNBLANK	CMP #>16192	LDA #0
ORA #16 ;SCREEN	BNE LET320	STA \$FC
STA 53265	LET330 LDA #>1024	LDX #3 ;*8
LET200 LDA HOLDA	STA 210	LET510 ASL \$FB
AND #2	LDA #0	ROL \$FC
BEQ LET210	STA 209	DEX
LDA 53265 ;SET	STA 211	BNE LET510
AND #223 ;TEXT	STA 214	LDA \$FC
STA 53265 ;MODE	JMP LET600	CLC
LDA 53272	CMP #29	ADC #8D0
AND #247	BNE LET350 ;RIGHT ARROW	STA \$FC
STA 53272	JSR TLINE	LDA FLAGS ;WHICH SET?
JMP LET220	JMP LET600	AND #4
LET210 LDA 53265 ;SET	CMP #17 ;DOWN ARROW	BEQ LET520 ;SET 1
ORA #32 ;BIT MAP	BNE LET360	LDA \$FC ;SET 2
STA 53265 ;MODE	JSR LET620	CLC
LDA 53272	JMP LET600	ADC #8
ORA #8	CMP #145 ;UP ARROW	STA \$FC
LET220 STA 53272	BNE LET370	STA 209
LDA HOLDA	LDA FLAGS	CLC
AND #4	AND #1	ADC 211
BEQ LET230	AND \$FF	STA #C3
LDA 53272 ;SET UPPER	STA 214	LDA 210
AND #253 ;CASE	BEQ SKIP	ADC #0
STA 53272	DEC 214	STA #C4
LDA FLAGS	LDA 209	LDX #8
AND #251	SEC	LDA 646
STA FLAGS	SBC #40	ASL A
LET230 LDA HOLDA	STA 209	ASL A
AND #8	LDA 210	ASL A
BEQ LET240		

```

ASL A
STA COLOR
LET530 LDY #0
LDA ($FB),Y ;CHARS
STA HOLDA
LDA FLAGS
BEQ LET550
AND #1
BEQ LET540
JSR DOUBLE
LET540 LDA FLAGS
AND #2
BEQ LET550
LDA HOLDA
EOR #255
STA HOLDA
LDA HOLDA+1
EOR #255
STA HOLDA+1
LET550 LDA HOLDA
STA ($FD),Y ;BIT MAP
LDA ($C3),Y ;COLOR
AND #15
ORA COLOR
STA ($C3),Y
LDY #40
STA ($C3),Y
INY
STA ($C3),Y
LDY #8
LDA HOLDA+1
STA ($FD),Y
INY
STA ($FD),Y
DINC $FB
DINC $FD
DEX
BNE LET560
INC 211
DEC $FE
LDA $FD
SEC
SBC #64
STA $FD
LDA $FE
SBC #0
STA $FE
JMP LET590
LET560 CPX #4
BNE LET580
LDA $FD
CLC
ADC #56
STA $FD
LDA $FE
ADC #1
STA $FE
JMP LET530
LET570 DINC $FD ;BIT MAP
DINC $FB ;CHARS
DEX
BEQ LET590
LET580 JMP LET530
LET590 JSR TLINE
LET600 LDY HOLDY
INY
DEC LENSTR
BEQ LET610
JMP LET030
LET610 LDA 1
ORA #4
STA 1
LDA 56334
ORA #1
STA 56334
LDA PRGNUM
BNE LETRET
JSR ENABLE
LETRET RTS
TLINE INC 211
LDA 211
CMP #40
BCC LET640
LDA #0
STA 211
LET620 LDA FLAGS
AND #1
STA $FF
LET630 LDA 214
CMP #24
BEQ LET640
INC 214
LDA 209
CLC

```

```

ADC #40
STA 209
LDA 210
ADC #0
STA 210
DEC $FF
BEQ LET630
LET640 RTS
ADJSCR LDY #<1024
STY $FD
LDY #>1024
STY $FE
ADJ01 LDY #0
LDA ($FD),Y
AND CODE1
ORA HOLDA
STA ($FD),Y
DINC $FD
LDY $FD
CPY #<2024
ADJ01 LDY $FE
CPY #>2024
ADJ01 RTS
DOUBLE TXA
PHA
LDA HOLDA
LDX
STX HOLDA
STX HOLDA+1
TAX
LDA #128
STA CODE1
LDA #192
STA CODE2
DBL1 TXA
AND CODE1
BEQ DBL2
LDA CODE2
ORA HOLDA
STA HOLDA
LSR CODE1
LSR CODE2
BNE DBL1
LDA #192
STA CODE2
DBL3 TXA
AND CODE1
BEQ DBL4
LDA CODE2
ORA HOLDA+1
STA HOLDA+1
LSR CODE2
LSR CODE1
BNE DBL3
BYT2 JSR UPDATE
BCS BYL20
SEC
SBC #'0
ASL A
STA HOLDA
LDY #4
BYL10 CLC
ADC HOLDA
DEY
BNE BYL10
STA HOLDA
JSR UPDATE
BCS BYL20
SEC
SBC #'0
CLC
ADC HOLDA
STA HOLDA
BYL20 RTS
UPDATE LDY HOLDY
INY
DEC LENSTR
BNE UP10
SEC
RTS
UP10 LDA ($A3),Y
STY HOLDY
CLC
RTS
.OPT MCL
SPECIAL .BYTE 144,0,5,1,28,2,159,3,156,4,
30,5,31,6
.BYTE 158,7,129,8,149,9,150,10,
151,11,152,12
.BYTE 153,13,154,14,155,15,0,0
ARROWS .BYTE 0,24,60,126,24,24,24,0,
24,120,56,104,96,192,192
.BYTE 0,4,6,255,255,6,4,0,0,192,
192,96,104,56,120,24
.BYTE 0,24,24,24,24,126,60,24,0,
3,3,6,22,28,30,24
.BYTE 0,32,96,255,255,96,32,0,0,
24,30,28,22,6,3,3
.END LETTERS
.LIB RECORDKEEPING

```

```

SAVEIT JSR POSREC
LDA HOLD3 ;LEVEL #
JSR CHROUT
LDA WIND ;WIND
JSR CHROUT
LDA HOLD ;MODE (A/M)
JSR CHROUT
LDA SHOTRK ;# SHOTS
JSR CHROUT
LDA HOLD3 ;LEVEL #
AND #127
CMP #5
BCC SAV010
LDA HOLD4 ;ACCURACY
JSR CHROUT ; SCORE
LDA PENAL ;PENALTIES
JSR CHROUT
LDX #0 ;FIRST 20
JSR SEEINF ; SHOTS
LDA HOLD3
AND #127
BNE SAV020
LDX #48 ;SKILL TEST
JSR SAVREC
LDX #24
JMP SAV070
SAV020 CMP #5
BCS SAV040
LDX #144 ;LEV 1-4
JSR SAVREC
DINC HOLD1 ;2ND RECORD
JSR POSREC
LDA HOLD3
CMP #3
BCS SAV030
LDX #72
JMP SAV070
SAV030 LDX #16 ;LEV 3-4
LDY #144 ;SHOTS 19-20
JSR SAV130
LDX #1
JSR SEEINF
LDX #32 ;SHOTS 21-24
JSR SAVREC
LDX #96
JMP SAV070
SAV040 CMP #10
BEQ SAV060
BIT HOLD3
BPL SAV050
LDX #1 ;SHOTS 21-40
JSR SEEINF
LDX #160
JSR SAVREC
JMP SAV090
SAV060 LDX #160 ;SHOTS 1-20
JSR SAVREC
LDX #1 ;SHOTS 21-40
JSR SEEINF
DINC HOLD1 ;2ND RECORD
JSR POSREC
LDX #160
JSR SAVREC
JMP SAV090
SAV070 LDY #0
SAV080 LDA #192,Y ;SAVE
JSR CHROUT ; DIAGNOSTICS
INY
DEX
BNE SAV080
SAV090 JSR CLRCHN
RTS
SEEINF LDA 1
PHA
LDA #54
STA 1
LDY #159
CPX #0
BNE SAV110
SAV100 LDA INFO2,Y
STA TEMP,Y
DEY
CPY #255
BNE SAV100
JMP SAV120
SAV110 LDA INFO2+160,Y
STA TEMP,Y
DEY
CPY #255
BNE SAV110
PLA
STA 1
RTS
SAVREC LDY #0
SAV130 LDA TEMP,Y
JSR CHROUT
INY
DEX
BNE SAV130
RTS
POSREC JSR CLRCHN
LDX #1
JSR CHKOUT
LDA #'P ;"P"
JSR CHROUT
LDA #104 ;CHR$(104)
JSR CHROUT
LDA HOLD1 ;CHR$(RELOC)

```

```

JSR  CHROUT
LDA  HOLD1+1 ;CHRS(RECHI)
JSR  CHROUT
LDA  #0 ;CHRS(0)
JSR  CHROUT
JSR  CLACHN
LDA  #8
JSR  CHROUT
RTS
.END RECORDKEEPING
PORT
PO010 LDA LOGON,X
      BEQ PO020
      JSR SEND
      INX
      BNE PO010
      LDA OFFX,X
      JSR SEND
      INX
      CPX #4
      BCC PO030
      LDA #0
      PO040 LDA LASTSH,X
      JSR SEND
      INX
      CPX #5
      BCC PO040
      LDA #128
      LDX LASTSH+8
      BNE PO050
      LDX LASTSH+7
      BMI PO050
      TXA
      PO050 STA STOP
      JSR SEND
      LDA SHOTS
      LDX #128
      AND #1
      BEQ PO060
      LDX #0
      PO060 TXA
      CLC
      ADC STOP
      STA STOP
      LDA 1
      PHA
      LDA #54
      STA 1
      PO070 LDA XLPB60,X
      JSR SEND
      LDA YLPB60,X
      JSR SEND
      INX
      CPX STOP
      BNE PO070
      LDA #10
      JSR SEND
      LDX #0
      PO080 LDA XLPB60,X
      JSR SEND
      LDA YLPB60,X
      JSR SEND
      INX
      CPX #10
      BCC PO080
      PLA
      STA 1
      RTS
LOGON .BYTE 202,205,194,0
SEND PHA
SEND10 BIT 56577 ;WAIT FOR
      BVS SEND10 ;DAR CLEAR
      ROR A ;HIGH NYBBLE
      ROR A
      ROR A
      ROR A
      ORA #128 ;SET DA
      STA 56577
SEND20 BIT 56577 ;WAIT FOR
      BVC SEND20 ;DAR SET
      LDA #0 ;CLEAR DA
      STA 56577
SEND30 BIT 56577 ;WAIT FOR
      BVS SEND30 ;DAR CLEAR
      PLA
      AND #15 ;LOW NYBBLE
      ORA #128 ;SET DA
      STA 56577
SEND40 BIT 56577 ;WAIT FOR
      BVC SEND40 ;DAR SET
      LDA #0 ;CLEAR DA
      STA 56577
      RTS
.END
*-32768
;MLCHORBI.TXT
      JMP CTRMOV
      JMP RANDOM
      JMP DODATA
      JMP BEGIN
      JMP GTINFO
      JMP REKEEP
      JMP DESCRP
      JMP GETXY
      .OPT
      .LIB CTRMOV
CTRMOV JSR ENABLE

```

```

LDA #0
STA HITSR
STA NUMR20
STA NUMR20+1
STA NUMR60
STA NUMR60+1
STA FSTAT
JSR $BIBF
LDA 101
STA IRQ
LDA 100
STA IRQ2
CTR010 LDA #0
      STA OFFSCR
CTR020 JSR MOVESP
      JSR PAUSE
      BCS CTR030
      JMP CTR380
CTR030 LDA SORTAF
      BNE CTR030
      JSR GETXY ;NO MORE SORT
      JSR CLOSES
      STA CURTAR
      TAX
      BNE CTR040
      JMP CTR110
CTR040 LDA SPECIL,X
      STA SPECIL
      LDA #0
      STA WDRIFT+1
      LDA WIND
      AND #96
      BEQ CTR070
      LDA XDRIFT,X
      ASL A ;RANGE*8
      ASL A
      ASL A
      STA XDRIFT
      LDA WIND ;GET SPEED
      AND #7
      CLC ;ADD TARGET
      ADC XDRIFT ;OFFSET
      TAY
      LDA WIND ;FULL OR
      AND #32 ;HALF VALUE?
      BNE CTR060
      LDA WTABLE,Y
      LSR A
      LSR A
      LSR A
      LSR A
      JMP CTR070
CTR060 LDA WTABLE,Y
      AND #15
CTR070 STA WDRIFT
      BIT WIND ;NEGATIVE
      BPL CTR080 ;DIRECTION?
      DEC WDRIFT+1
      EOR #255
      STA WDRIFT
      DINC WDRIFT
CTR080 LDA YDRIFT,X
      STA TRAJ
      LDA TIMEFL,X
      BEQ CTR110
      STA CURTF
      LDA INSTK,X
      BEQ CTR110
      LDX HOLD1
      LDA V,X
      CTR090 STA HOLD2
      JSR MOVESP
      JSR PAU010
      LDA OFFSCR
      BEQ CTR100
      EOR #255
      AND V+21
      STA V+21
      LDA #0
      STA OFFSCR
CTR100 LDA V+21
      AND HOLD3
      BEQ CTR110
      LDX HOLD1
      LDA V,X
      CMP HOLD2
      BEQ CTR090
      DEC CURTF
      BNE CTR090
CTR110 LDA XVAL
      CLC
      ADC WDRIFT
      STA XVAL
      STA V
      LDA XVAL+1
      ADC WDRIFT+1
      STA XVAL+1
      LDA YVAL
      CLC
      ADC TRAJ
      STA YVAL
      STA V+1
      LDA V+16
      AND #254
      LDX XVAL+1
      BEQ CTR120
      ORA #1
CTR120 STA V+16

```

```

LDA V+28 ;TURN OFF
AND #254 ;MULTICOLOR
STA V+28 ;FOR SPR 0
LDA #34 ;BULLET
STA 2040
LDA #12 ;MED GRAY
STA V+39
LDA #0
STA SSCOL
LDA IRQ2 ;NO CHECK
AND #32 ;FOR
      CTR150 ;COLLISION?
      LDA V+21 ;TURN ON FOR
      ORA #1 ;COLLISION
      STA V+21 ;CHECK
      LDX #2
      LDA IRQ
      CTR130 ;CHECK FOR
      ORA #32 ;COLLISION
      STA IRQ
CTR140 LDA IRQ
      AND #32
      BNE CTR140
      DEX
      BNE CTR130
      LDA V+21 ;TURN OFF
      AND #254 ;BULLET
      STA V+21
CTR150 LDA #0
      STA $FC
      LDA SHOTS
      ASL A
      ASL A
      ASL A
      ASL A
      ROL $FC
      CLC
      ADC #<INFO
      STA $FB
      LDA $FC
      ADC #>INFO
      STA $FC
      LDA SSCOL
      AND #254
      TAY
      LDA #2
      STA CODE3 ;2*(HIT SPR#)
      LDX #1 ;HIT SPR#
CTR160 TYA
      STX CODE2
      AND CODE3
      CLC
      BNE CTR170
      INX
      ASL CODE3
      BCC CTR160
      LDX #0
      STX CODE2
      LDX CURTAR
CTR170 LDA TARNUM,X
      BCC CTR180
      ORA #128
      JMP CTR190
CTR180 INC HITS
CTR190 LDY #0
      STA TARNUM
      STA ($FB),Y ;TARGET ID
      STA LASTSH,Y
      INY
      LDA XVAL+1
      LSR A
      LDA XVAL
      ROR A
      STA ($FB),Y ;BULK/2
      STA LASTSH,Y
      INY
      LDA YVAL
      STA ($FB),Y ;BULY
      STA LASTSH,Y
      INY
      LDA SPECIL,X
      STA SPECIL
      LDA CENX,X
      STA CENX
      LDA CENY,X
      STA CENY
      TXA
      ASL A ;FOR SPR XY
      PHA
      LDA V+16
      LSR A ;PUT RIGHT
      DEX ;X IN
      BPL CTR200 ;CARRY
      TXA
      LDA V,X
      ROR A ;RIGHT X
      CLC ;ADD CENTER X
      ADC CENX ;OFFSET
      STA ($FB),Y ;TARK/2
      STA LASTSH,Y
      INY
      LDA V+1,X
      CLC ;ADD CENTER Y
      ADC CENY ;OFFSET
      STA ($FB),Y ;TARY
      STA LASTSH,Y
      LDA IRQ2 ;IS THIS SHOT
      AND #4 ;A REPEAT?
      BNE CTR220

```



```

LDA $FB ;STORE IN
CLC ; 2ND INFO
ADC #C344 ; BUFFER
STA STA ; (DISK
LDA $FC ; RECORDS
ADC #C344 ; ONLY HAVE
STA $FC ; ORIGINAL
LDA SHOTS ; SHOT)
CLC
ADC #1
STA SHOTRK
LDY #7
CTR210 LDA LASTSH,Y
STA ($FB),Y
DEY
BPL CTR210 ;PUT UP CROSS
CTR220 LDA KVAL
SEC
SBC #10
STA V
LDA KVAL+1
SBC #0
TAX
LDA V+16
AND #254
CPX #0
BEQ CTR230
CTR230 ORA #1
STA V+16
LDA YVAL
SEC
SBC #9
STA V+1
LDA #42
STA 2040
LDA V+28 ;MULTICOLOR
ORA #1 ; MODE ON
STA V+28
LDA #1 ;WHITE
STA V+39
LDA IRQ2 ;DON'T
AND #16 ; DISPLAY
BNE CTR250 ; CROSS?
LDA IRQ2
AND #8
BEQ CTR240
LDA LASTSH
BPL CTR250
CTR240 LDA V+21
ORA #1
STA V+21
CTR250 LDA SSCOL ;WAS CLOSEST
AND HOLD3 ; TARGET HIT?
BNE CTR260 ;YES
LDX CURTAR
BEQ CTR260
LDA SPECIL,X
AND #64 ;REVERSE
BEQ CTR260 ; DIRECTION?
LDA INSTK,X
EOR #255
CLC
ADC #1
STA INSTK,X
CTR260 LDA SPECIL
BPL CTR265
JMP CTR340
CTR265 AND #32 ;IS THIS
BEQ CTR290 ; TARGET MORE
LDA #128 ; THAN 1 SPR?
STA CODE1
LDX #7
CTR270 LDA V+21
AND CODE1
BEQ CTR280
LDA TARNUM,X
CMP TARNUM
BNE CTR280
LDA CODE1
ORA CODE3
STA CODE3
CTR280 LSR CODE1
DEX
BNE CTR270
CTR290 LDA HITSPR ;TURN OFF ANY
EOR #255 ; TARGET PRE-
ORA #1 ;VIOUSLY HIT
AND V+21
STA V+21
LDX LASTSH
LDA IRQ2
AND #16
BEQ CTR300
CPX #128
BCC CTR310
JMP CTR320
CTR300 LDA IRQ2 ;SPECIAL
AND #8 ; CROSS?
BEQ CTR330
CPX #128 ;MISS?
BCS CTR330
CTR310 LDA IRQ2 ;IF RET AFTER
AND #128 ; EACH TARGET
BNE CTR320 ; LEAVE IT UP
LDA CODE3 ;TURN OFF
EOR #255 ; HIT TARGET
AND V+21 ; NOW
STA V+21

CTR320 LDA #0
STA HITSPR
JMP CTR340
CTR330 LDA CODE3 ;SET UP TO
ORA #1 ; TURN OFF
STA HITSPR ; HIT TARGET
LDA #0 ;STOP HIT
LDX CODE2 ; TARGET
STA INSTK,X
LDA #30
STA CRSDLA
CTR340 BIT TARNUM
BVS CTR370
LDX #7 ;CHECK FOR
LDA #128 ; PENALTIES
STA CODE1
CTR350 LDA V+21 ;SPRITE MUST
AND CODE1 ; BE ON
BEQ CTR360
LDA TARNUM ;HIT TARGET
AND #127
CMP TARNUM,X
BCC CTR360
BEQ CTR360 ; OR EQUAL
INC PENAL
JMP CTR370
CTR360 LSR CODE1
DEX
BPL CTR350
CTR370 JSR ROTATE
INC SHOTS
LDA IRQ
AND #251
STA IRQ
SEC
JSR CKSPCL
BCS CTR430
LDA SHOTS
CMP MAXSHT
BCC CTR380
LDA IRQ
ORA #1
STA IRQ
JMP CTR020
CTR380 LDA IRQ
AND #192
BEQ CTR430
LDA #56321
CMP #127
BNE CTR390
LDA #128 ;BREAK KEY
STA FSTAT ; FLAG
JMP CTR430
CTR390 LDA OFFSCR
BNE CTR400
JMP CTR020
CTR400 AND #1 ;WHISTLE
BEQ CTR420 ; FLAG
LDA V+21 ;SPRITE ON?
AND #254
BEQ CTR410
JSR WHISTL
CTR410 LDA OFFSCR ;CLEAR FLAG
AND #254
STA OFFSCR
CTR420 LDA OFFSCR
EOR #255
AND V+21
STA V+21
CLC
JSR CKSPCL
BCS CTR430
JMP CTR010
CTR430 LDA IRQ
AND #15
STA IRQ
MOVE $FB,TARORD
LDY #0
LDA ($FB),Y
CMP #254
BNE CTR440
DINC
CTR440 LDA #0
LDY FSTAT
JSR #B391
RTS
CKSPCL LDA IRQ2 ;RETURN WHEN
BNI CKSP10 ; NO TARGETS
AND #64 ; UP?
BEQ CKSP40
LDA V+21
AND #254
BNE CKSP40
BCC CKSP30
CKSP20 LDA IRQ
AND #192
BNE CKSP20
CKSP30 SEC
RTS
CKSP40 CLC
RTS
MOVESP LDY #14
LDX #7
LDA #128
STA HOLD
MOV010 LDA V+21
AND HOLD
BEQ MOV060

LDA INSTK,X ;STATIONARY?
MOV060 BEQ CDLSTK,X ;MOVE IT?
DEC CDLSTK,X
BNE MOV060
LDA HOLD
AND OFFSCR
BNE MOV060
LDA DLSTK,X
STA CDLSTK,X
LDA HOLD ;CHECK
AND V+16 ; RIGHT X
BEQ MOV020
LDA #1
MOV020 STA HOLDX
LDA INSTK,X ;ADD
STA HOLDY ; INCREMENT
CLC
ADC V,Y
STA V,Y
LDA #0
BIT HOLDY ;INCREMENT<0?
BPL MOV030
LDA #255
MOV030 ADC HOLDX
BEQ MOV040
LDA HOLD
ORA V+16
STA V+16
LDA V,Y
CMP #55
BCS MOV050
JMP MOV060
MOV040 LDA HOLD
EOR #255
AND V+16
STA V+16
LDA V,Y
CMP #10
BCS MOV060
MOV050 LDA HOLD
ORA OFFSCR
STA OFFSCR
MOV060 DEY
DEY
LSR
DEX
BNE MOV010
RTS
PAUSE LDA IRQ ;TRIG PULL
AND #4
BEQ PAU010
SEC
RTS
PAU010 LDA #566
SEC
SBC #1
BNE PAU020
CLC
RTS
CLOSES LDA #255
STA HOLDA ;LOW DISTANCE
LDA #128
STA CODE1 ;SPRITE CODE
STA TARNUM ; FOR MISS
LDA KVAL+1
LSR A
LDA KVAL
ROR A
STA HOLDX ;BULLET X
LDA #0
STA HOLD1
STA HOLD3
LDA #14
LDA V+21 ;SPRITE ON?
AND CODE1
BEQ CLO050
LDA V+1,X
SEC
SBC YVAL
BCS CLO020
EOR #255
CLC
ADC #1
CLO020 STA HOLDY ;TARY-BULY
LDA V+16
AND CODE1
CLC
BEQ CLO030
SEC
CLO030 LDA V,X
ROR A
SEC
SBC HOLDX
BCS CLO040
EOR #255
CLC
ADC #1
CLO040 CLC
ADC HOLDY ;XDIF+YDIF
ROR A ;(XDIF+YDIF)/2
CMP HOLDA
BCS CLO050
STA HOLDA
STX HOLD1
LDA CODE1
STA HOLD3
CLO050 LSR CODE1
DEX

```

```

DEX
BNE CLO010
LDA HOLD1
LSR A
RTS
;TABLE
.BYTE 0,16,17,33,49,66,66,0
.BYTE 0,17,33,50,66,83,115,0
.BYTE 0,17,49,66,99,116,148,0
.BYTE 0,33,66,83,116,148,181,0
.BYTE 0,33,66,99,148,181,215,0
.BYTE 0,49,83,132,181,231,248,0
.END CTRMOV
.OPT NOL
.LIB DATAITEMS
;DATAITEMS FOR BRM PROGRAM
DODATA JSR WHCDAT
LDA #<DITEMS
CLC
ADC STOP
STA STOP
LDA #>DITEMS
ADC STOP+1
STA STOP+1
ADDR $FD,52480
LDY #0
DOD010 LDA ($FB),Y
STA ($FD),Y
DINC $FB
DINC $FD
LDA $FB
CMP STOP
BCC DOD010
LDA $FC
CMP STOP+1
BCC DOD010
RTS
;PROCEDURE RANDOM
;POKE STOP WITH THE STARTING LOC
; IN STACK (X=START-16325)
; AND 16325-XXXXX WITH THE DATA
; ITEMS. POKE HOLD1,HOLD2 WITH
; ADDRESS OFFSET OF DATA TO BE
; MOVED.
RANDOM LDX STOP
ADDR $FD,52480
RAN010 JSR WHCDAT
LDA 16325,X
BMI RAN020
JSR SEARCH
INX
BNE RAN010
LDY #0
LDA #255
STA ($FD),Y
RTS
SEARCH STA $A3
STX $A4
LDY #0
LDX #0
CMP #0
BEQ RAN060
RAN030 LDA ($FB),Y
DINC $FB
RAN040 LDA $FB
CLC
ADC #14
STA $FB
LDA $FC
ADC #0
STA $FC
DEX
BNE RAN040
LDA ($FB),Y
BFL RAN050
DINC $FB
RAN050 DEC $A3
BNE RAN030
RAN060 LDA ($FB),Y
STA $A3
STA ($FD),Y
INY
RAN070 LDX #14
RAN080 LDA ($FB),Y
STA ($FD),Y
INY
DEX
BNE RAN080
DEC $A3
BNE RAN070
LDA ($FB),Y
BFL RAN090
STA ($FD),Y
INY
RAN090 TYA
CLC
ADC $FD
STA $FD
LDA $FE
ADC #0
STA $FE
LDA $A4
RTS
WHCDAT LDA #<DITEMS
CLC
ADC HOLD1
STA $FB
LDA #>DITEMS

```

```

ADC HOLD1+1
STA $FC
RTS
;ZERO DATA (0-16)
DITEMS .BYTE 1,0,150,1,37,12,255,0,0,0,
4,0,0,6,15,254,255
;EXTENDED PRETEST DATA (17-113)
.BYTE 1,141,159, 1, 41,204, 10, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1,107,150, 4, 37, 12, 16, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 1, 93,140, 5, 38, 12, 18, 0,
0, 0, 5, 1, 0, 6, 16,254
.BYTE 1,193,159, 1, 41,204, 10, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1, 75,150, 4, 37, 12, 16, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 1,149,140, 5, 38, 12, 18, 0,
0, 0, 5, 1, 0, 6, 16,254,255
;LEVELS 1-4 (114-224)
.BYTE 2, 0,169, 1, 39,204, 8, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 0,169, 1, 40,204, 8, 0, 0,
0, 0,255, 32, 0, 32,254
.BYTE 1, 0,159, 2, 41,204, 11, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1, 0,170, 3, 35, 12, 13, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 1, 0,160, 4, 36, 12, 16, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 1, 0,150, 5, 37, 12, 19, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 1, 0,140, 6, 38, 12, 21, 0,
0, 0, 5, 1, 0, 6, 16,254,255
;LEVELS 5-9 (225-312)
.BYTE 1,243,152, 2, 41,204, 8, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1,130,160, 3, 35, 12, 10, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 2, 48,165, 1, 39,204, 6, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 6, 0,
0, 0, 0,255, 48, 0, 32,254
.BYTE 1,130,160, 3, 35, 12, 10, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 1,230,115, 6, 38, 12, 16, 0,
0, 0, 5, 1, 0, 6, 16,254
.BYTE 1,218,145, 4, 36, 12, 12, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 1,194,130, 5, 37, 12, 14, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 2, 48,165, 1, 39,204, 6, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 6, 0,
0, 0, 0,255, 48, 0, 32,254
.BYTE 1,218,145, 4, 36, 12, 12, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 1,194,130, 5, 37, 12, 14, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 2,243,152, 2, 41,204, 18, 0,
0, 0, 1,254, 0, 12, 36
.BYTE 194,130, 5, 37, 12, 18, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 1,218,145, 4, 36, 12, 12, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 3, 48,165, 1, 39,204, 12, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 12, 0,
0, 0, 0,255, 48, 0, 32
.BYTE 243,152, 2, 41,204, 12, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1,130,160, 3, 35, 12, 10, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 1,194,130, 5, 37, 12, 16, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 3, 48,165, 1, 39,204, 16, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 16, 0,
0, 0, 0,255, 48, 0, 32
.BYTE 150,160, 3, 35, 12, 16, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 1,243,152, 2, 41,204, 10, 0,
0, 0, 1,254, 0, 12, 36,254
.BYTE 1,130,160, 3, 35, 12, 12, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 3, 48,165, 1, 39,204, 16, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 16, 0,
0, 0, 0,255, 48, 0, 32
.BYTE 218,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 3, 48,165, 1, 39,204, 12, 0,
0, 0, 0,255, 32, 24, 32
.BYTE 96,165, 1, 40,204, 12, 0,
0, 0, 0,255, 48, 0, 32
.BYTE 243,152, 2, 41,204, 12, 0,
0, 0, 1,254, 0, 12, 36,144
.BYTE 1,221,160, 3, 35, 12, 4, 0,
0, 0, 2,254, 1, 6, 12,132,134
;SCREEN 9
.BYTE 1,205,152, 2, 41,204, 12, 0,
0, 0, 1,254, 1, 12, 36, 0
.BYTE 1,101,160, 3, 35, 12, 10, 0,
0, 0, 2,254, 1, 6, 12, 0
.BYTE 1,205,160, 3, 35, 12, 8, 0,
0, 0, 2,254, 1, 6, 12,136,140
;SCREEN 10
.BYTE 1,111,160, 3, 35, 12, 8, 0,
0, 0, 2,254, 1, 6, 12, 0
.BYTE 1,255,145, 4, 36, 12, 6, 0,
0, 0, 3,255, 1, 6, 14,134,134
;SCREEN 11
.BYTE 3,241,160, 3, 35, 12, 16, 0,
0, 0, 2,254, 3, 6, 12
.BYTE 99,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 3, 6, 14
.BYTE 215,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 3, 6, 14,132
.BYTE 1,151,130, 5, 37, 12, 12, 0,
0, 0, 4, 0, 1, 6, 15,140,138
;SCREEN 12
.BYTE 1,101,130, 5, 37, 12, 8, 0,
0, 0, 4, 0, 1, 6, 15,132
.BYTE 1,239,130, 5, 37, 12, 4, 0,
0, 0, 4, 0, 1, 6, 15,132,136
;SCREEN 13
.BYTE 2,147,115, 6, 38, 12, 14, 0,

```

```

0, 0, 1,254, 0, 12, 36
.BYTE 130,160, 3, 35, 12, 16, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 1,130,160, 3, 35, 12, 16, 0,
0, 0, 2,254, 0, 6, 12,254
.BYTE 2,243,152, 2, 41,204, 20, 0,
0, 0, 1,254, 0, 12, 36
.BYTE 218,145, 4, 36, 12, 20, 0,
0, 0, 3,255, 0, 6, 14,254
.BYTE 2,130,160, 3, 35, 12, 24, 0,
0, 0, 2,254, 0, 6, 12
.BYTE 194,130, 5, 37, 12, 24, 0,
0, 0, 4, 0, 0, 6, 15,254
.BYTE 2,243,152, 2, 41,204, 18, 0,
0, 0, 1,254, 0, 12, 36
.BYTE 218,145, 4, 36, 12, 18, 0,
0, 0, 3,255, 0, 6, 14,254
;ATTACK/RETREAT 1 (913-1586)
;SCREEN 1
.BYTE 1,147,115, 6, 38, 12, 8, 0,
0, 0, 5, 1, 1, 6, 16,136,140
;SCREEN 2
.BYTE 1,233,115, 6, 38, 12, 14, 0,
0, 0, 5, 1, 1, 6, 16, 0
.BYTE 1,131,130, 5, 37, 12, 12, 0,
0, 0, 4, 0, 1, 6, 15, 0
.BYTE 1, 79,115, 6, 38, 12, 10, 0,
0, 0, 5, 1, 1, 6, 16,138,138
;SCREEN 3
.BYTE 2,171,130, 5, 37, 12, 8, 0,
0, 0, 4, 0, 2, 6, 15
.BYTE 65,145, 4, 36, 12, 8, 0,
0, 0, 3,255, 2, 6, 14,136,134
;SCREEN 4
.BYTE 2,13,130, 5, 37, 44, 16, 0,
0, 0, 4, 0, 2, 6, 15
.BYTE 59,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 2, 6, 14,131
.BYTE 1,211,160, 3, 35, 12, 12, 0,
0, 0, 2,254, 1, 6, 12,131
.BYTE 1,103,145, 4, 36, 12, 8, 0,
0, 0, 3,255, 1, 6, 14,136,140
;SCREEN 5
.BYTE 1,253,160, 3, 35, 12, 8, 0,
0, 0, 2,254, 1, 6, 12, 0
.BYTE 1, 43,152, 2, 41,204, 6, 0,
0, 0, 1,254, 1, 12, 36,134,134
;SCREEN 6
.BYTE 1,181,160, 3, 35, 12, 12, 0,
0, 0, 2,254, 1, 6, 12,131
.BYTE 1,251,152, 2, 41,204, 8, 0,
0, 0, 1,254, 1, 12, 36,131
.BYTE 2, 41,165, 1, 39,204, 4, 0,
0, 0, 0,255, 33, 24, 32
.BYTE 89,165, 1, 40,204, 4, 0,
0, 0, 0,255, 49, 0, 32,132,130
.BYTE 3, 47,152, 2, 41,204, 20, 0,
0, 0, 1,254, 3, 12, 36
.BYTE 189,152, 2, 41,204, 20, 0,
0, 0, 1,254, 3, 12, 36
.BYTE 19,160, 3, 35, 44, 20, 0,
0, 0, 2,254, 3, 6, 12,140
.BYTE 3,107,152, 2, 41,204, 8, 0,
0, 0, 1,254, 2, 12, 36
.BYTE 207,165, 1, 39,204, 8, 0,
0, 0, 0,255, 34, 24, 32
.BYTE 255,165, 1, 40,204, 8, 0,
0, 0, 0,255, 50, 0, 32,136,130
.BYTE 5, 29,165, 1, 39,204, 20, 0,
0, 0, 0,255, 36, 24, 32
.BYTE 77,165, 1, 40,204, 20, 0,
0, 0, 0,255, 52, 0, 32
.BYTE 91,152, 2, 41,204, 20, 0,
0, 0, 1,254, 4, 12, 36
.BYTE 153,152, 2, 41,204, 20, 0,
0, 0, 1,254, 4, 12, 36
.BYTE 255,152, 2, 41,204, 20, 0,
0, 0, 1,254, 4, 12, 36,144
.BYTE 1,221,160, 3, 35, 12, 4, 0,
0, 0, 2,254, 1, 6, 12,132,134
;SCREEN 9
.BYTE 1,205,152, 2, 41,204, 12, 0,
0, 0, 1,254, 1, 12, 36, 0
.BYTE 1,101,160, 3, 35, 12, 10, 0,
0, 0, 2,254, 1, 6, 12, 0
.BYTE 1,205,160, 3, 35, 12, 8, 0,
0, 0, 2,254, 1, 6, 12,136,140
;SCREEN 10
.BYTE 1,111,160, 3, 35, 12, 8, 0,
0, 0, 2,254, 1, 6, 12, 0
.BYTE 1,255,145, 4, 36, 12, 6, 0,
0, 0, 3,255, 1, 6, 14,134,134
;SCREEN 11
.BYTE 3,241,160, 3, 35, 12, 16, 0,
0, 0, 2,254, 3, 6, 12
.BYTE 99,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 3, 6, 14
.BYTE 215,145, 4, 36, 12, 16, 0,
0, 0, 3,255, 3, 6, 14,132
.BYTE 1,151,130, 5, 37, 12, 12, 0,
0, 0, 4, 0, 1, 6, 15,140,138
;SCREEN 12
.BYTE 1,101,130, 5, 37, 12, 8, 0,
0, 0, 4, 0, 1, 6, 15,132
.BYTE 1,239,130, 5, 37, 12, 4, 0,
0, 0, 4, 0, 1, 6, 15,132,136
;SCREEN 13
.BYTE 2,147,115, 6, 38, 12, 14, 0,

```

```

0, 0, 5, 1, 2, 6, 16
.BYTE 63,130, 5, 37, 12, 14, 0,
0, 0, 4, 0, 2, 6, 15, 0
.BYTE 1,237,115, 6, 38, 12, 12, 0,
0, 0, 5, 1, 1, 6, 16,140,140
:SCREEN 14
.BYTE 1,105,115, 6, 38, 12, 8, 0,
0, 0, 5, 1, 1, 6, 16,138,255
.END DATAITEMS
.LIB BEGIN
BEGIN LDA #0
STA 53280
STA 53281
LDA #21
STA 53272
LDA #27
STA 53265
PRINT MSG1
LDA #2
JSR CKANS
STA 512
STA PINFO
LDA #58
JSR CKANS
STA 513
STA PINFO+1
LDY #0
JSR DTOA
BEQ BEGIN
CMP #13
BCS BEGIN
LDY #5
JSR RARROW
LDA #/
STA PINFO+2
LDA #4
JSR CKANS
STA 512
STA PINFO+3
LDA #58
JSR CKANS
STA 513
STA PINFO+4
LDY #0
JSR DTOA
BEQ BEGIN
CMP #32
BCS BEGIN
LDY #6
JSR RARROW
LDA #/
STA PINFO+5
LDA #58
JSR CKANS
STA PINFO+6
LDA #58
JSR CKANS
STA PINFO+7
LDA #13
STA PINFO+8
JSR $FFD2 ;CHROUT
JSR $FFD2 ;CHROUT
JSR $FFD2 ;CHROUT
BGL10 PRINT MSG2
LDY #9
JSR GETANS ;A-E OK
CPY #11
BNE BGL15
LDA 521
CMP #A
BCC BGL15 ;<A
CMP #F
BCC BGL20 ;<F
BGL15 JSR CLRLNE
JMP BGL10
BGL20 PRINT MSG3
LDY #11
JSR GETANS
CPY #14
BEQ BGL25
CPY #13
BNE BGL30
LDA PINFO+11
CMP #1 ;<'1'
BCC BGL30
CMP #58 ;>'9'
BCS BGL30
STA PINFO+12
LDA #0
STA PINFO+11
LDA #13
STA PINFO+13
JMP BGL50
BGL25 LDY #11
JSR DTOA
BCC BGL40
JSR CLRLNE
JMP BGL20
BGL40 BEQ BGL30
CMP #11
BCS BGL30
BGL50 PRINT MSG4
LDY #14
JSR GETANS
CPY #16
BNE BGL60
LDA 526
CMP #1

```

```

BCC BGL60
CMP #3
BCC BGL70
JSR CLRLNE
JMP BGL50
LDX #23
LDY #9
CLC
JSR $FFFO ;SET CURSOR
PRINT MSG5
JSR $FFE4 ;GETIN
CMP #0
BEQ BGL80
CMP #Y
BEQ BGL90
CMP #N
BNE BGL80
JMP BEGIN
BGL90 RTS
GETANS JSR $FFCF ;CHRN
STA 512,Y
STA PINFO,Y
INY
CPY #20
BEQ GETL10
CMP #13
BNE GETANS
GETL10 LDA #13
JSR $FFD2 ;CHROUT
RTS
CLRLNE LDA #145 ;UP ARROW
JSR $FFD2 ;CHROUT
LDY #38
CLRL10 LDA #32 ;SPACE
JSR $FFD2 ;CHROUT
DEY
BNE CLRL10
LDA #13
JSR $FFD2 ;CHROUT
LDA #145 ;UP ARROW
JSR $FFD2 ;CHROUT
RTS
DTOA LDA 513,Y
SEC
SBC #48
CMP #10
BCS DTOA30
LDA 512,Y
SEC
SBC #48
CMP #10
BCS DTOA30
DTOA10 STA $FF
LDX #9
DTOA20 CLC
ADC $FF
BCS DTOA30
DEX
BNE DTOA20
INY
CLC
ADC 512,Y
SEC
SBC #48
CLC
DTOA30 RTS
CKANS STA MAXVAL
CKANS1 JSR $FFE4 ;GETIN
CMP #0
BEQ CKANS1
CMP #0
BCC CKANS1
CMP MAXVAL
BCS CKANS1
JSR $FFD2 ;CHROUT
RTS
RARROW LDA #29
JSR $FFD2 ;CHROUT
DEY
BNE RARROW
RTS
GTINFO LDA #16
LDY #0
STA (71),Y
INY
LDA #<PINFO
STA (71),Y
INY
LDA #>PINFO
STA (71),Y
RTS
MSG1 .BYTE 147,142,13,5,'WELCOME TO
MACS',13,13
MSG2 .BYTE 'ENTER DATE (USE LEADING
ZEROS): ',13,13
MSG3 .BYTE ' -- -- 19--',13
.BYTE ' MONTH DAY YEAR'
MSG4 .BYTE 13,145,145,' ,0
MSG5 .BYTE 'COMPANY (A-E): ',0
MSG6 .BYTE 'BATTALION (1-10): ',0
MSG7 .BYTE 'BRIGADE (1-2): ',0
MSG8 .BYTE 'IS THIS CORRECT (Y/N)?',
13,0
.END BEGIN
.LIB REKEEP
REKEEP LDA #0
JSR SETNAM
LDA #1

```

```

LDX #8
LDY #15
JSR SETLFS
JSR OPEN
BCS MODISK
LDX #1
JSR CHKOUT
BCC DISKON
LDA #1
JSR CLOSE
JSR CLCRHN
LDA #0
TAY
JSR FLOAT
JMP REC5
DISKON LDA #1
JSR CLOSE
JSR CLCRHN
ADDR $A3,S1
LDA $S2-S1
STA LENSTR
JSR LETML
REC1 ADDR $A3,S2
LDA $S3-S2
STA LENSTR
JSR LETML
LDX #Y
JSR GKEY
BCS REC2
ADDR $A3,S3
LDA $S4-S3
STA LENSTR
JSR LETML
LDX #N
JSR GKEY
BCC REC1
LDA $S5-S4
STA LENSTR
$FD
SEC
SBC #N
BEQ REC3
LDY #1
LDA #0
JSR FLOAT
ADDR $A3,S4
JMP REC4
REC3 TAY
JSR FLOAT
ADDR $A3,S5
JSR LETML
REC4 LDY #255
REC5 JSR WAIT
LDY #255
JSR WAIT
LDY #255
JSR WAIT
JSR NOTTRG
RTS
GKEY LDA #8FF
STA $A3
LDA #880
STA $A4
STX $FD
GKEY1 JSR GETIN
CMP #0
BNE GKEY2
DEC $A3
BNE GKEY5
DEC $A4
BNE GKEY5
CLC
RTS
GKEY2 CMP #Y
BEQ GKEY4
CMP #N
BNE GKEY1
GKEY4 STA $FD
SEC
RTS
GKEY5 LDA 56321
CMP #247
BNE GKEY1
SEC
RTS
S1 .OPT NOL
.BYTE $1311,$8511,$1111,$1111,
$1111,$1120,$2020,$85C4
.BYTE 'O YOU WISH TO KEEP
RECORDS?',17,17,13
S2 .BYTE $2085,$2020,$2020,$05D9,
$C5D3,$2020,$2020
.BYTE $2020,$2020,$9785,$9D9D,
$4E4F,$910D
S3 .BYTE $2085,$2020,$2020,$9720,
$2020,$9D9D,$9D85,$5945
.BYTE $5320,$8520,$2020,$2020,
$2020,$05CE,$CF85,$910D
S4 .BYTE $0585,$2020,$2020,$2020,
$2020,$D9C5,$D320
.BYTE '
S5 .BYTE $0585,$2020,$2020,$2020,
$2020,$20CE,$CF20
.BYTE '
.OPT LIST
.END REKEEP
.OPT NOL
.LIB DESCRIPTIONS

```

```

DESCRF ADDR $FB,DESC
ADDR $A3,16192
LDX HOLD1
BEQ DES050
LDY #0
DES010 DEX
BEQ DES020
LDA ($FB),Y
CLC
ADC #1
CLC
ADC $FB
STA $FB
LDA $FC
ADC #0
STA $FC
JMP DES010
DES020 LDA #40
SEC
SBC ($FB),Y
LSR A
TAY
LDX #0
LDA #32
DES030 STA 16192,X
INX
DEY
BNE DES030
LDA ($FB),Y
STA HOLD1
INX
INX
INX
INX
DEC HOLD1
BNE DES040
STX LENSTR
JSR LETHL
RTS
DES050 INC HOLD1
LDA HOLD1
DES060 CMP $FD :START
LDX #14 :LIGHT BLUE
STX 646
DES070 CMP $FE :FINAL
BCC DES080
BEQ DES080
LDX #0 :BLACK
STX 646
DES080 LDX #32
STX 16192
STX 16195
ORA #48
STA 16193
CMP #58
BNE DES090
LDA #1
STA 16192
LDA #0
STA 16193
DES090 LDA #1
STA 16194
LDY #0
LDA ($FB),Y
PHA
TAY
DES100 LDA ($FB),Y
STA 16195,Y
DEY
BNE DES100
PLA
TAY
DINC $FB
CLC
ADC $FB
PHA
LDA $FC
ADC #0
PHA
LDA $FD
PHA
LDA $FE
PHA
LDA #13
STA 16196,Y
INX
INX
INX
INX
INX
INX
STY LENSTR
JSR LETHL
PLA
STA $FE
PLA
STA $FD
PLA
STA $FC
PLA
STA $FB
INC HOLD1
LDA HOLD1
CMP #11
BNE DES060
RTS
DESC .BYTE 31,201,'NTRODUCTION/',211,
'UPPORTED ',208,'OSITION'
.BYTE 33,201,'NTRODUCTION/',213,
'NSUPPORTED ',208,'OSITION'
.BYTE 32,212,'IMED ',212,
'ARGETS/',211,'UPPORTED ',208,'OSITION'
.BYTE 34,212,'IMED ',212,
'ARGETS/',213,'NSUPPORTED ',208,
'OSITION'
.BYTE 22,208,'RACTICE ',210,
'RECORD ',198,'IRE ',201
.BYTE 23,208,'RACTICE ',210,
'RECORD ',198,'IRE ',201,201
.BYTE 11,210,'ECORD ',198,'IRE'
.BYTE 19,210,'APID ',210,'ECORD
',198,'IRE ',201
.BYTE 20,210,'APID ',210,'ECORD
',198,'IRE ',201,201
.BYTE 11,195,'OMBAT ',198,'IRE'
.END DESCRIPTIONS
.LIB GETXYSORT
:GETXY AND SORT
:PROCEDURE GETXY
:DETERMINES BULLET STRIKE
:B:NONE
:C:SYS GETXY
:A:PUTS THE BULLET STRIKE (X AND Y
VALUES) IN XVAL AND YVAL.
GETXY LDA STSIZE
STA NSRT
JSR SORT
LDA STSIZE :FIND THE
LSR A :MEDIAN OF
TAX :THE SRTBUF
LDA SRTBUF,X
ASL A :*2
STA XVAL :SET UP FOR
LDA #0 :ADDITION OF
BCC GXY10 :OFFSET X
LDA #1 :BULLET RIGHT
GXY10 STA XVAL+1
DADD XVAL,OFFX
LDA STSIZE :FIND MEDIAN
LSR A :OF THE
CLC :Y HALF OF
ADC STSIZE :THE SRTBUF
TAX
LDA SRTBUF,X
STA YVAL :Y MEDIAN
LDA #0 :SET UP FOR
STA YVAL+1 :OFFSET ADD Y
DADD YVAL,OFFY
RTS
:
:PROCEDURE SORT
:SORTS NSRT ELEMENTS IN SRTBUF
:B:POKE NSRT, (# OF ELEMENTS)
:C:SYS SORT
:A:ELEMENTS IN SRTBUF ARE SORTED
SORT ADDR $FD,SRTBUF
LDY NSRT
BEQ SRT30
DEY
BEQ SRT30
STY HOLD
LDY #0
SRT10 LDA ($FD),Y
INX
CMP ($FD),Y
BCC SRT20 :DON'T SORT
TAX :SWAP X VALS
LDA ($FD),Y
DEY
STA ($FD),Y
INX
TXA
STA ($FD),Y
TYA :SWAP CORRE-
CLC :SPONDING Y
ADC NSRT :VALUES
TAY
DEY
LDA ($FD),Y
TAX
INX
LDA ($FD),Y
DEY
STA ($FD),Y
INX
TXA
STA ($FD),Y
TYA
SEC
SBC NSRT
TAY
SRT20 CPY HOLD
BNE SRT10
LDY #0
DEC HOLD
BNE SRT10
SRT30 RTS
.END GETXYSORT
.OPT LIST
-49152
: STARTUP.TXT FOR M16 BRM CART
: STARTUP/SUBS (1646 BYTES)
: 49152-50797 (0-0) 32768-34413
: PRINT FILES (4765 BYTES)
: 16384-21168 (0-0) 36141-40925
: MLPRINTFILES (34 BYTES)
: 3400-3433 (0-0) 40926-40959
: MLCHOBK1 (4793 BYTES)
: NOMOVE (0-1) 32768-37560
: BRM.SCENARIO.3 (2918 BYTES)
: INDIRECT COPY (0-1) 38042-40959
: OPENING.SCENARIO (4165 BYTES)
: INDIRECT COPY (0-2) 32768-36932
: SIGHT PICTURE (2856 BYTES)
: 16384-19239 (0-2) 36933-39788
: CALIBRATION (1171 BYTES)
: 16384-17554 (0-2) 39789-40959
: BRM.3400 (4782 BYTES)
: 3400-8181 (0-3) 32768-37549
: BRM.SCENARIO.4 (2992 BYTES)
: INDIRECT COPY (0-3) 37968-40959
: BRM.BAS (1) (8192 BYTES)
: 16384-24575 (1-0) 32768-40959
: BRM.BAS (2) (8192 BYTES)
: 24576-32767 (1-1) 32768-40959
: BRM.BAS (3) (2733 BYTES)
: 32768-35500 (1-2) 32768-35500
: ZERO.BAS (1) (2034 BYTES)
: 16384-19217 (1-2) 38126-40959
: ZERO.BAS (2) (8192 BYTES)
: 19218-27409 (1-3) 32768-40959
: ZERO.PICTURE.1 (8000 BYTES)
: 8192-16191 (2-0) 32768-40767
: ZERO.PICTURE.2 (8000 BYTES)
: 8192-16191 (2-1) 32768-40767
: BRM.SCENARIO.1 (4677 BYTES)
: INDIRECT COPY (2-2) 32768-37444
: BRM.SCENARIO.2 (3039 BYTES)
: INDIRECT COPY (2-2) 37445-40483
: ZERO.3000 (4689 BYTES)
: 3000-7688 (2-3) 32768-37456
: BRM.SPRITES (832 BYTES)
: 2176-3007 (2-3) 37457-38261
: ZERO.SPRITES (576 BYTES)
: 2176-2751 (2-3) 38289-38864
: ZERO.50090 (2095 BYTES)
: 50090-52184 (2-3) 38865-40959
.OPT NOL
CTRREG =1000
SCRCT1 =1001
SCRCT2 =1002
GUNDL =1003
.WORD ESTART-16384,$FEBC
.BYTE 195,194,205,56,48
PRGNUM .BYTE 0
:
:PROCEDURE SELSUB
: SELECTS SUBROUTINE ON CHOBK1
: BY POKING ADDRESS FROM BASIC
SELSUB LDA #1
STA $DFFF
JSR 32768
LDA #32
STA $DFFF
RTS
JMP BRM :BRM
JMP PRGSEL :PRGSEL
ESTART STX $D016
JSR $FDA3 :IOINIT
JSR $FD50 :RAMTAS
JSR $FD15 :RESTOR
JSR $FF5B :CINT
CLI
JSR $E453 :COPY VECTORS
JSR $E3BF :INIT
BRM LDA #0
STA 53280
STA 53281
STA $DFFF
LDA #43
STA 53265
ADDR $FD,49152
ADDR STOP,FIN
ADDR #A3,$8000
JSR MOVEIT-16384
JMP NEWLOC
NEWLOC LDA #234 :DISABLE STOP
STA 808 :KEY
LDA #128 :DISABLE CDR/
STA 657 :SHIFT KEYS
LDA #C16384 :BASIC START
STA 641 :OS BOTTOM L
LDA #216384 :BASIC BOT H
STA 44 :BASIC BOT H
STA 642 :OS BOTTOM H
LDA #C16385 :BASIC BOT L
STA 43 :BASIC TOP
ADDR 55,40960 :BASIC TOP
LDA #0
STA PRGNUM
STA 198
STA V+16
STA V+21
LDX #0
JSR PREPAR
JSR DSABLE
LDA #0
STA V+39
STA V+28
STA V+29
STA V+23
LDA #34

```

```

STA 2040
ADDR $FD,32768
LDA #2
STA $FB ;CHIP #/BANK
JSR SCENE
SEI
ADDR $314,START
ADDR $FB,FM16
LDA #40
STA SCRC11
LDA #1
STA CTRREG
LDA #0
STA SA1
STA SA2
CLI
JMP MVL050
PRGSEL LDA PRGNUM
CMP #1 ;CALIBRATION?
BNE MVL010
LDX $CALIB-DATA
JSR PREPAR
JMP MVL040
MVL010 CMP #2 ;PRINT FILES?
BNE MVL020
LDX $PFILES-DATA
JSR PREPAR
JMP MVL040
MVL020 CMP #3 ;ZRO&SCHANG?
BNE MVL030
LDX $ZEROSC-DATA
JSR PREPAR
JMP MVL050
MVL030 LDX $SITPIC-DATA
JSR PREPAR
MVL040 LDA #21 ;TEXT SCREEN
STA 53272
LDA #27
STA 53265
LDA #147 ;CLEAR SCREEN
JSR $FFD2
MVL050 LDA #32 ;RAM
STA $DFFF
LDA #0
STA 198
JSR $A871
JMP $A7AE ;RUN
PREPAR LDA DATA,X
STA 101
AND #63
STA $DFFF
INX
LDA DATA,X
STA $FD
INX
LDA DATA,X
STA $FE
INX
LDA DATA,X
STA 101
BIT 101
BPL PREP20
STA 45
PREP20 INX
LDA DATA,X
STA STOP+1
BIT 101
BPL PREP30
STA 46
PREP30 INX
LDA DATA,X
STA $A3
INX
LDA DATA,X
STA $A4
INX
JSR MOVEIT
BIT 101
BVC PREPAR
RTS
MOVEIT LDY #0
MVL060 LDA ($A3),Y
STA ($FD),Y
DINC $A3
$FD
LDA $FD
CMP STOP
BNE MVL060
LDA $FE
CMP STOP+1
BNE MVL060
RTS
DATA .BYTE 3 ;BRM.3400
.WORD 3400,8182,32768
.BYTE 11 ;BRM.SPRITES
.WORD 2176,3000,37457
.BYTE 4 ;BRM.BAS (1)
.WORD 16384,24576,32768
.BYTE 5 ;BRM.BAS (2)
.WORD 24576,32768,32768
.BYTE 198 ;BRM.BAS (3)
.WORD 32768,35501,32768
CALIB .BYTE 194 ;CALIBRATION
.PFILES .WORD 16384,17555,39789
.BYTE 0 ;MLPRINTFILES
.WORD 3400,3434,40926
.BYTE 192 ;PRINT FILES
.WORD 16384,21169,36141

```

```

ZEROSC .BYTE 11 ;ZERO.3000
.WORD 3000,7689,32768
.BYTE 11 ;ZERO.50090
.WORD 50090,52185,38865
.BYTE 11 ;ZERO.SPRITES
.WORD 2176,2752,38289
.BYTE 6 ;ZERO.BAS (1)
.WORD 16384,19218,38126
.BYTE 199 ;ZERO.BAS (2)
.WORD 19218,27410,32768
SITPIC .BYTE 194 ;SIGHT PICTURE
.WORD 16384,19240,36933
.LIB INTRO
;INTRO.TXT FOR BRM CARTRIDGE INTRO
START LDA $A2
AND #3
BNE INL040
ADDR $A3,1226
LDX #12
INL010 LDY #3
INL020 LDA ($A3),Y
CLC
ADC #16
STA ($A3),Y
DEY
BPL INL020
LDA $A3
CLC
ADC #40
STA $A3
LDA $A4
ADC #0
STA $A4
DEX
BNE INL010
INL040 LDA $A1
AND #2
BEQ INL070
LDA #15 ;GUN BANG
STA 54296
LDA #10
STA 54277
LDA #30
STA 54273
LDA #128
STA 54276
LDA #129
STA 54276
LDA #15
STA V
LDA #208 ;X: SPRITE 0
STA V+1 ;Y: SPRITE 0
LDA #1
STA V+16 ;RIGHT X
STA V+21 ;SPRITE CTARG
LDA #0
STA $A1
LDA CTRREG
ORA #8
STA CTRREG
ADDR $A3,1334
LDX #9
INL050 LDY #6
LDA #33
INL060 STA ($A3),Y
DEY
BPL INL060
LDA $A3
CLC
ADC #40
STA $A3
LDA $A4
ADC #0
STA $A4
DEX
BNE INL050
LDA #<13960
STA $FD
LDA #<13960
STA $C3
LDA #>13960
STA $FE
STA $C4
LDA #5
STA GUNDL
INL070 LDA CTRREG
AND #1
BEQ INL130
LDA $A2 ; SCROLL
AND #7
BNE INL130
LDY #0
INL080 LDA 15880,Y
STA 15872,Y
INX
BNE INL080
INL090 LDA 16136,Y
STA 16128,Y
INX
CPY #56
BNE INL090
LDY #7
INL100 LDA ($FB),Y
CMP #254
BEQ INL110
STA 16184,Y
DEY
BPL INL100

```

```

LDA $FB
CLC
ADC #8
STA $FB
LDA $FC
ADC #0
STA $FC
JMP INL130
INL110 LDA #0
STA 16184,Y
DEY
BPL INL110
DEC SCRC11
INL130 BNE INL130
LDA #3
STA SCRC12
EOR CTRREG
STA CTRREG
LDY #39
LDA #33
INL120 STA 1984,Y
DEY
BPL INL120
INL130 LDA CTRREG
AND #2
INL150 BEQ #248 ;BLINK
LDY #248
INL140 LDA PSBTB-1,Y
STA 15911,Y
DEY
BNE INL140
LDA #180
STA SCRC11
LDA CTRREG
EOR #66
STA CTRREG
INL150 LDA CTRREG
AND #8
BEQ INL170
LDY #0 ;KICK LEFT
JSR SPRUPD
INL160 LDA ($C3),Y
STA ($FD),Y
INX
CPY #240
BNE INL160
LDA $C3
CLC
ADC #64
STA $C3
LDA $C4
ADC #1
STA $C4
LDA $C4
ADC $FD
CLC
ADC #64
STA $FD
LDA $FE
ADC #1
STA $FE
DEC GUNDL
BNE INL170
LDA #10
STA GUNDL
LDA CTRREG
EOR #24
STA CTRREG
INL170 LDA CTRREG
AND #16
BEQ INL180
JSR SPRUPD
DEC GUNDL ;GUN DELAY
BNE INL180
LDA CTRREG
EOR #48
STA CTRREG
LDA #5
STA GUNDL
LDA #<13952
STA $FD
LDA #<13960
STA $C3
LDA #>13960
STA $FE
STA $C4
INL180 LDA CTRREG
AND #32
BEQ INL220
LDY #240 ;KICK RIGHT
JSR SPRUPD
INL190 LDA ($FD),Y
STA ($C3),Y
DEY
CPY #255
BNE INL190
LDA $C3
CLC
ADC #64
STA $C3
LDA $C4
ADC #1
STA $C4
LDA $FD
ADC #64
STA $FD
LDA $FE
ADC #1

```

```

STA $FE
DEC GUNDL
BNE INL220
LDA CTRREG
AND #223
STA CTRREG
LDA #0
STA V+21 :SPRITE CTRRG
ADDR $A3,1334
LDX #9
INL200 LDY #6
LDA #177
INL210 STA ($A3),Y
DEY
BPL INL210
LDA $A3
CLC
ADC #40
STA $A3
LDA $A4
ADC #0
STA $A4
DEX
BNE INL200
INL220 LDA CTRREG
AND #64
BEQ INL280
DEC SCRCT1 :DELAY PSB
BNE INL280
DEC SCRCT2
BNE INL240
LDA CTRREG
EOR #65
STA CTRREG
ADDR $FB,FM16
LDY #40
STY SCRCT1
DEY
LDA #177
INL230 STA 1984,Y
DEY
BPL INL230
JMP INL260
INL240 LDA SCRCT2
AND #1
BEQ INL250
LDA CTRREG
EOR #66
STA CTRREG
JMP INL280
INL250 LDA #60
STA SCRCT1
INL260 LDY #247
LDA #0
INL270 STA 15912,Y
DEY
BNE INL270
INL280 JMP $EA31
SPRUPD INC V :X: SPRITE 0
INC V
INC V
RTS
FM16 .BYTE 126,96,96,120,96,96,96,0,0,
0,60,102,102,102,60,0,0,0,124
.BYTE 102,96,96,96,0,0,0,0,0,0,0,0,
0,0,124,102,102,124,102,102,124
.BYTE 0,0,0,60,6,62,102,62,0,0,0,0,
62,96,60,6,124,0,0,24,0,56,24
.BYTE 24,60,0,0,0,0,60,96,96,96,60,
0,0,0,0,0,0,0,124,102,102
.BYTE 124,120,108,102,0,0,24,0,
56,24,24,60,0,0,14,24,62,24,24,24
.BYTE 0,0,56,24,24,24,24,60,0,0,
0,60,102,126,96,60,0,0,0,0,0
.BYTE 0,0,0,99,119,127,107,99,99,
99,0,0,0,60,6,62,102,62,0,0,0
.BYTE 124,102,96,96,96,0,0,96,96,
108,120,108,102,0,0,0,62,96,60
.BYTE 6,124,0,0,0,102,127,127,
107,99,0,0,0,60,6,62,102,62,0,0,0
.BYTE 124,102,102,102,102,0,0,0,
62,96,60,6,124,0,0,96,96,124,102
.BYTE 102,102,0,0,24,0,56,24,24,
60,0,0,0,124,102,102,124,96,96
.BYTE 0,0,0,0,0,0,0,0,126,24,24,
24,24,24,24,0,0,0,124,102,96,96
.BYTE 96,0,0,0,60,6,62,102,62,0,
0,24,0,56,24,24,60,0,0,0,124,102
.BYTE 102,102,102,0,0,24,0,56,24,
24,60,0,0,0,124,102,102,102,102
.BYTE 0,0,0,62,102,102,62,6,124,
254,254,254,254,254,254,254,254
PSBTH .BYTE 0,102,60,255,60,102,0,0,0,
102,60,255,60,102,0,0,0,102,60,255
.BYTE 60,102,0,0,0,0,0,0,0,0,0,0,
124,102,102,124,96,96,96,0,0,0
.BYTE 124,102,96,96,96,0,0,0,60,
102,126,96,60,0,0,0,62,96,60,6,124
.BYTE 0,0,0,62,96,60,6,124,0,0,0,
0,0,0,0,0,60,102,96,60,6,102
.BYTE 60,0,0,0,124,102,102,124,
96,96,0,0,60,6,62,102,62,0,0,0,60
.BYTE 96,96,96,60,0,0,0,60,102,
126,96,60,0,0,96,96,124,102,102,124
.BYTE 0,0,0,60,6,62,102,62,0,0,0,0,
124,102,96,96,96,0,0,0,0,0,0,0
.BYTE 0,0,0,24,126,24,24,14,0,
0,0,60,102,102,102,60,0,0,0,0

```

```

.BYTE 0,0,0,0,124,102,102,124,
102,102,124,0,0,0,60,102,126,96,60
.BYTE 0,0,0,62,102,102,62,6,124,
0,24,0,56,24,24,60,0,0,0,124,102
.BYTE 102,102,102,0,0,0,0,0,0,0,
0,0,0,102,60,255,60,102,0,0,0,102
.BYTE 60,255,60,102,0,0,0,102,60,
255,60,102,0,0
FIN
.END INTRO
.OPT LIST
.END

```